

Assembly Instructions

Ito



resource

WARNING

READ CAREFULLY BEFORE BEGINNING INSTALLATION.

IMPROPER INSTALLATION OF THE PRODUCT MAY CAUSE SERIOUS INJURY



Installation must be performed by a licensed contractor or a trained professional, who will ensure proper assembly and installation.



Installation must be performed by at least 2 people.



Improper installation of this product can cause serious or fatal injury.



Improper installation may result in permanent damage to the bed.



All hardware must be properly tightened. No parts of the model should be left loose or unstable.

Warranties for all products purchased from Resource Furniture, LLC are only valid if the product has been properly assembled, Installed by a trained professional, and operated in accordance with the assembly instructions.

Resource Furniture accepts no responsibility for any damage or injury caused by Improper Installation.

MAIN INSTRUCTIONS

TRANSFORMING SYSTEM ASSEMBLY AND SAFETY

Carefully read before proceeding!



Follow with care all points of the assembly procedure, as per technical sheets and their sequence showed in the following pages, and all the safety rules indicated.

The product is self-supporting and must be placed on a perfectly levelled floor.

Due to the joint movement of the inter functional components, the freestanding models could present some extremely slight vibration or very small shift that, in case, can be avoided through fixation of the product to wall or to surface.

Installer is responsible for workmanlike assembly and test of the product.

Installation must be **completed** by professional and skilled workers.

When the transforming system is combined in a composition with cabinets, wardrobes, storage units or bookcases, these elements must be anchored to wall by an independent fastening respect to the one of the transforming system.




An incorrect installation may cause incidents and injuries to the final user.

Clei is not responsible for any possible alterations, tempering and changes on the transforming system by third parties.

Clei refuses any kind of responsibility for improper use of this transforming system like incorrect handling, as well as for any kind of incompetence and negligence by installer and final user.

CLEI REFUSES ANY KIND OF RESPONSIBILITY FOR ASSEMBLIES NON-COMPLIANT TO THE INSTRUCTIONS AND PROCEDURES DESCRIBED IN THE PRESENT ASSEMBLY MANUAL.

Ito OVERVIEW

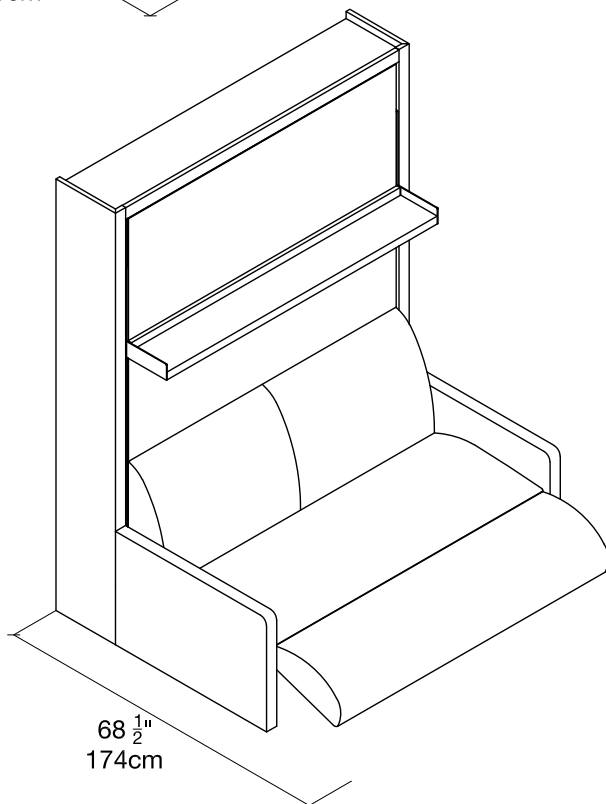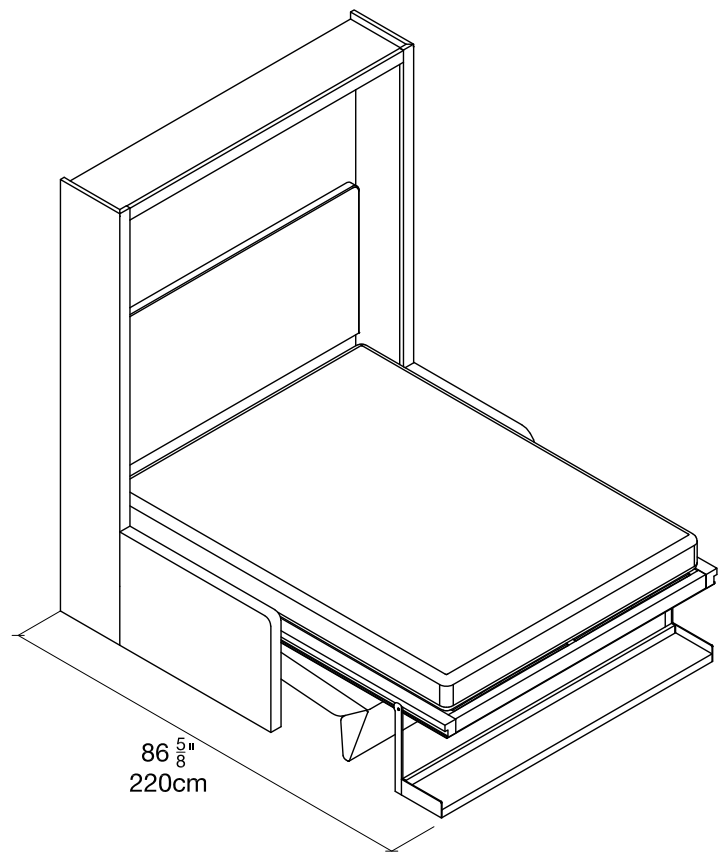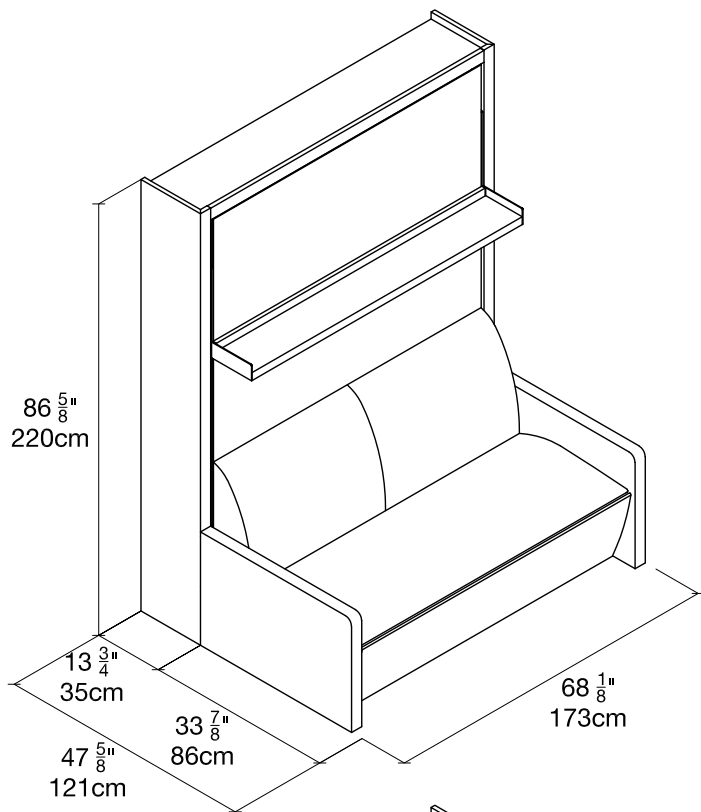


SWING MATTRESS SPECIFICATIONS



Recommended weight: ~ 64 lbs

Recommended dimensions: 79 1/2 x 60 x 7"

Ito OVERVIEW












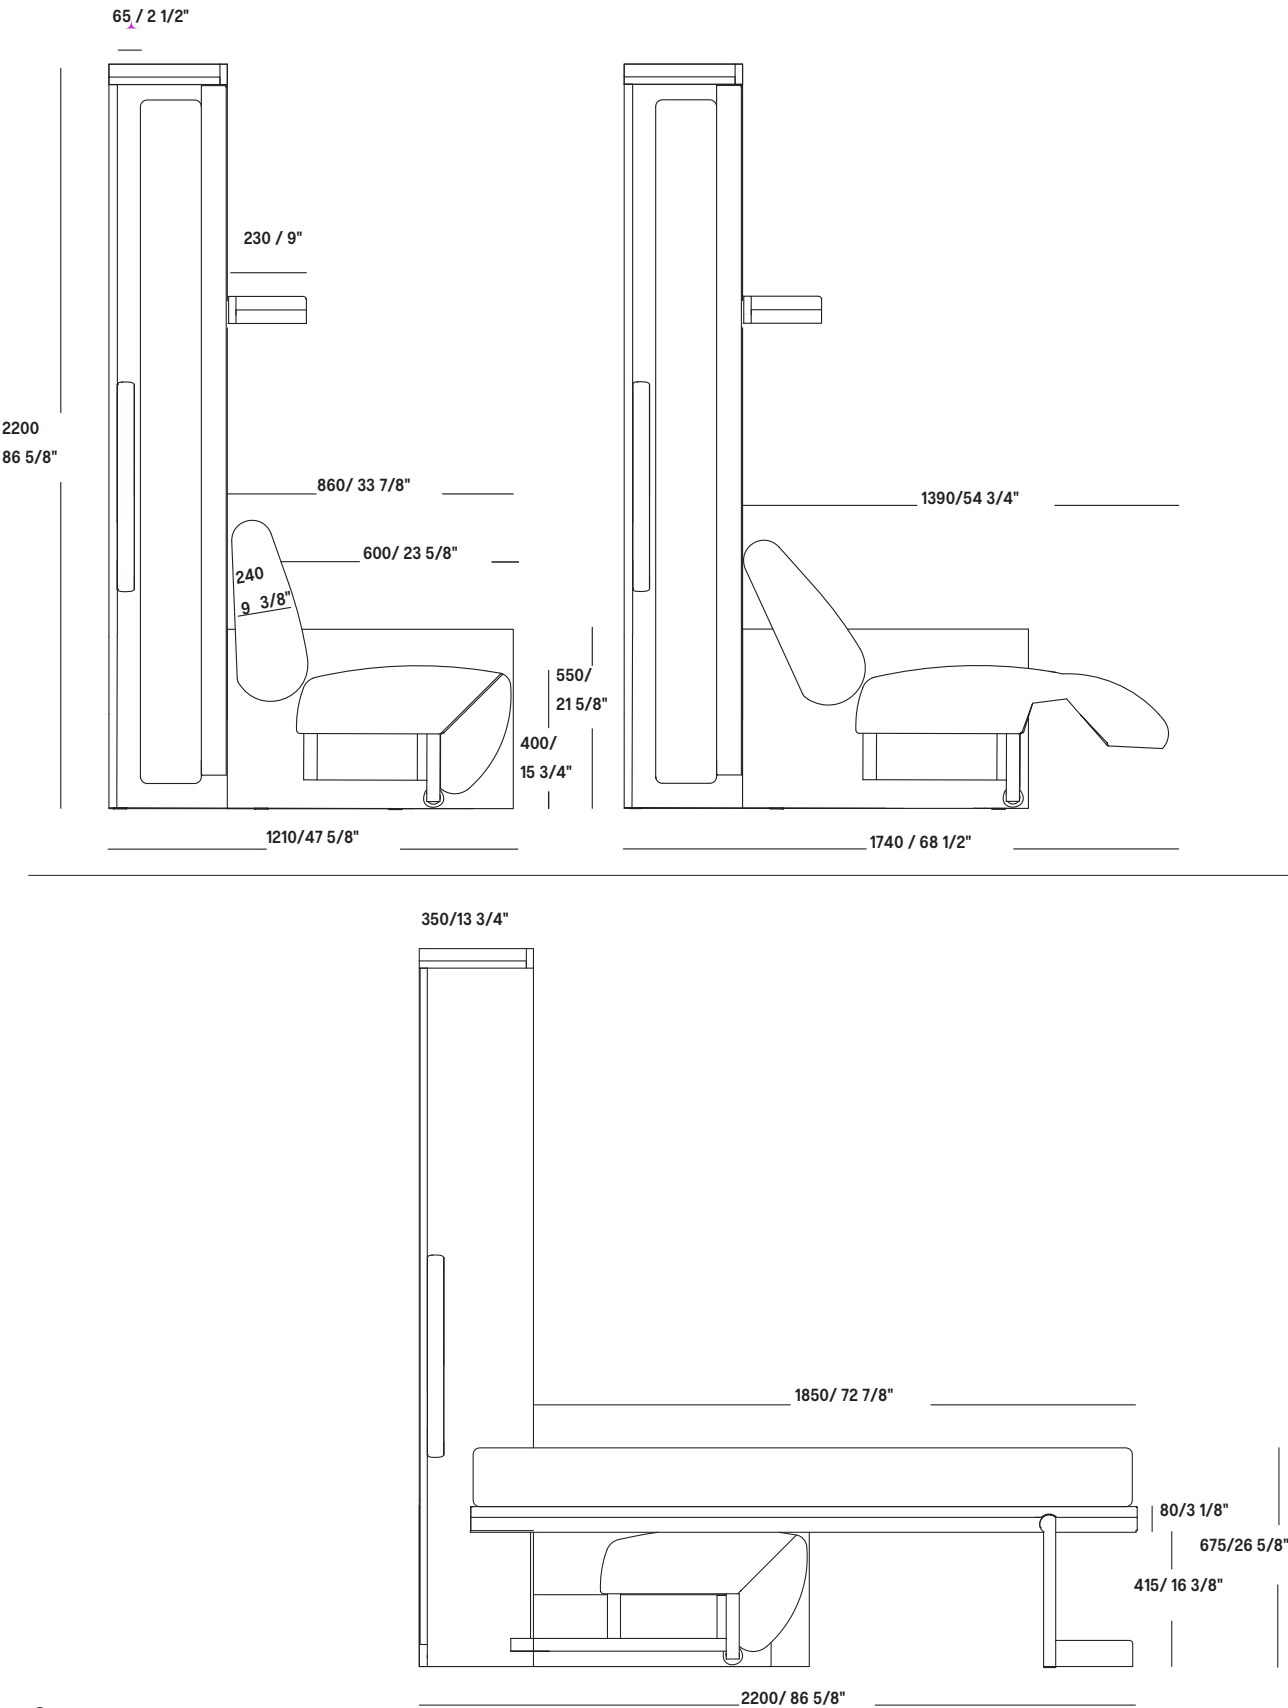


Ito OVERVIEW


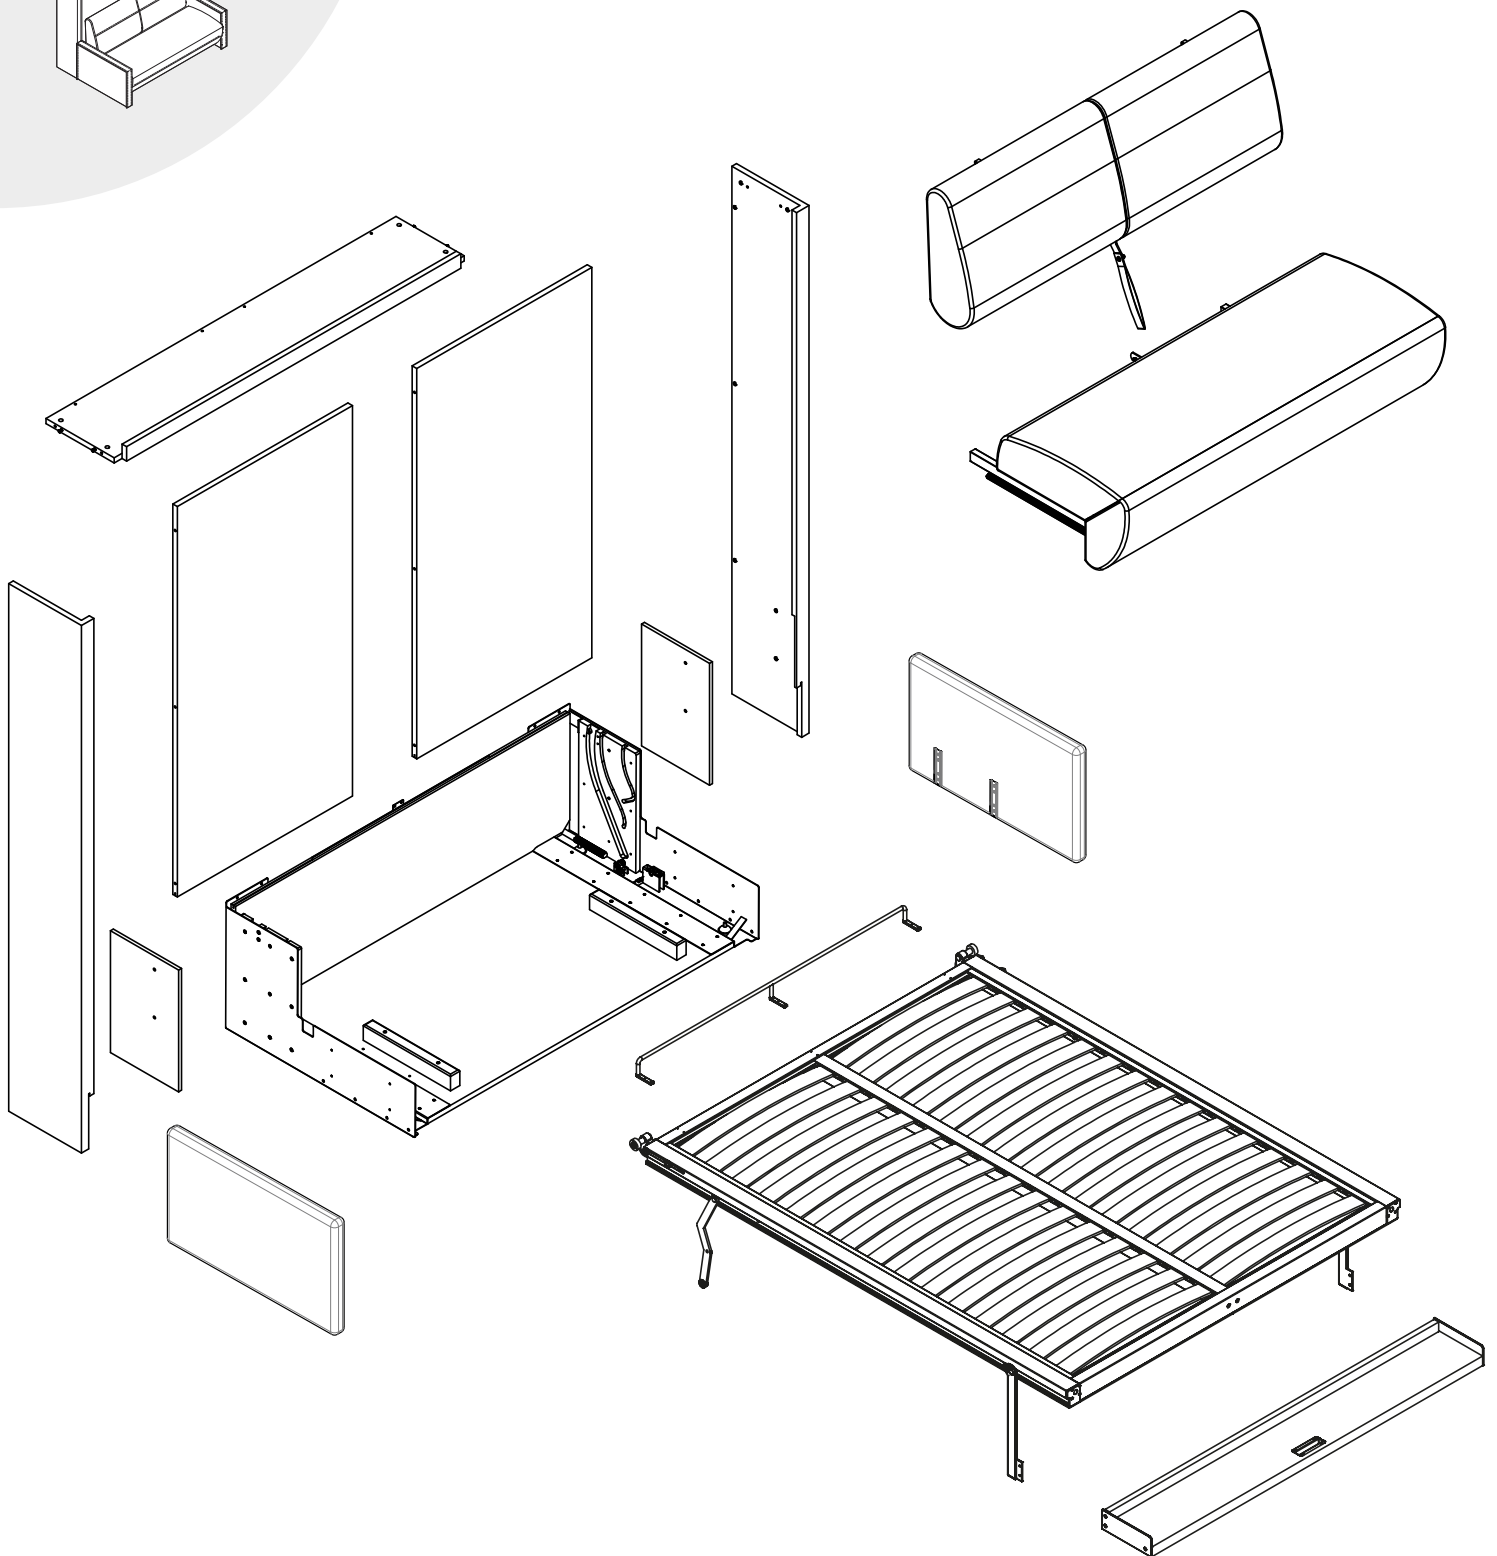



Ito COMPONENTS


HARDWARE

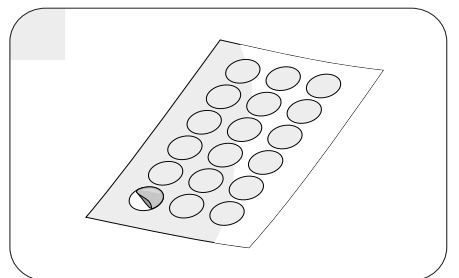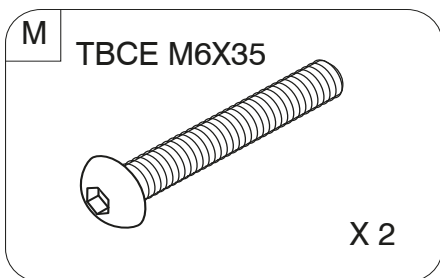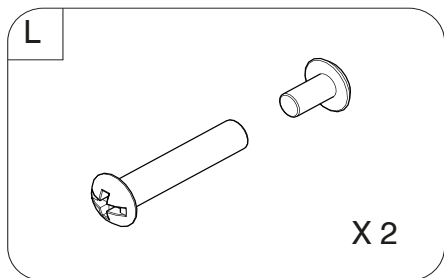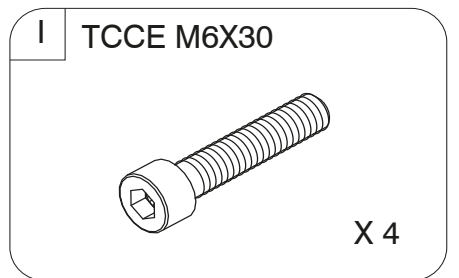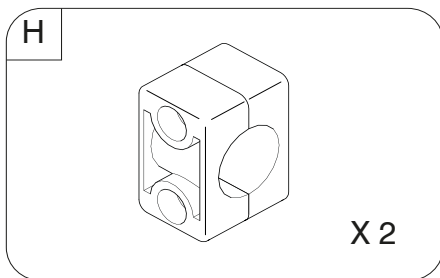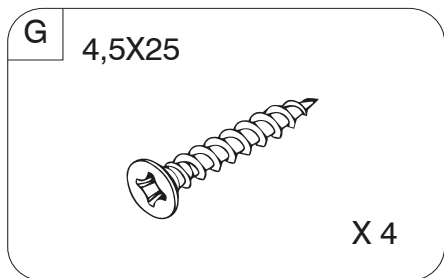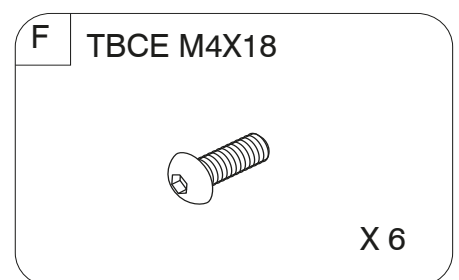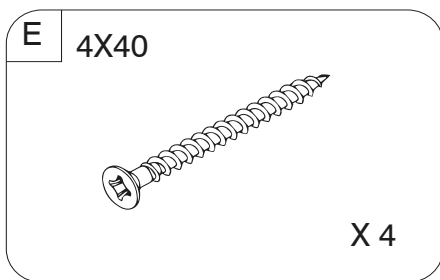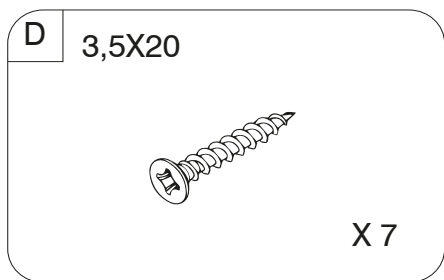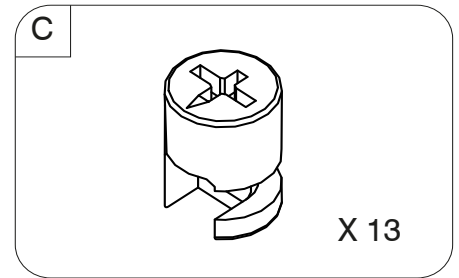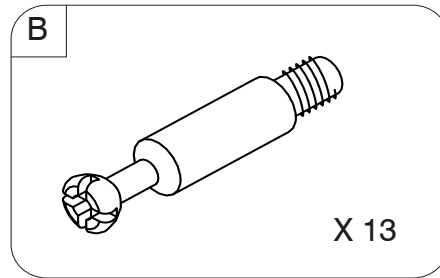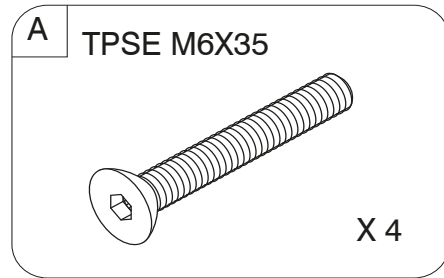


TOOLS



STRUCTURE ASSEMBLY

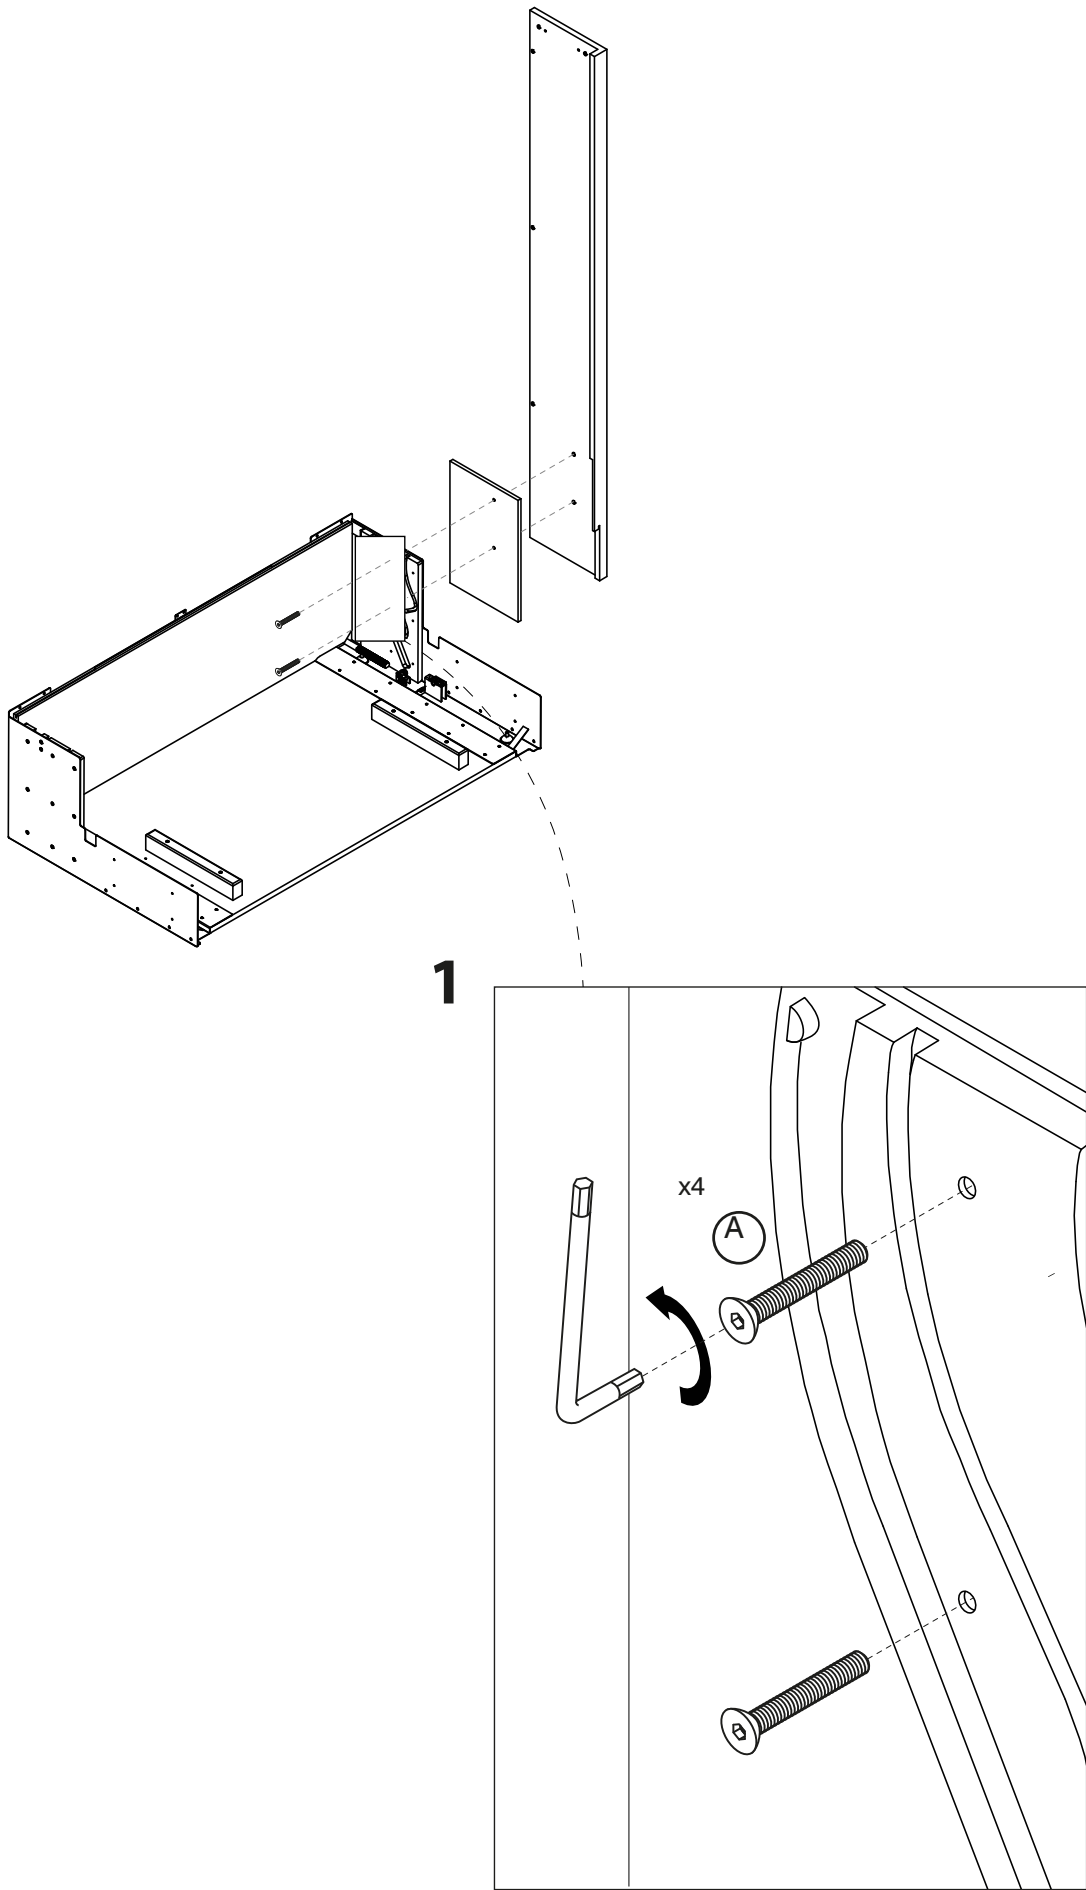


STRUCTURE ASSEMBLY

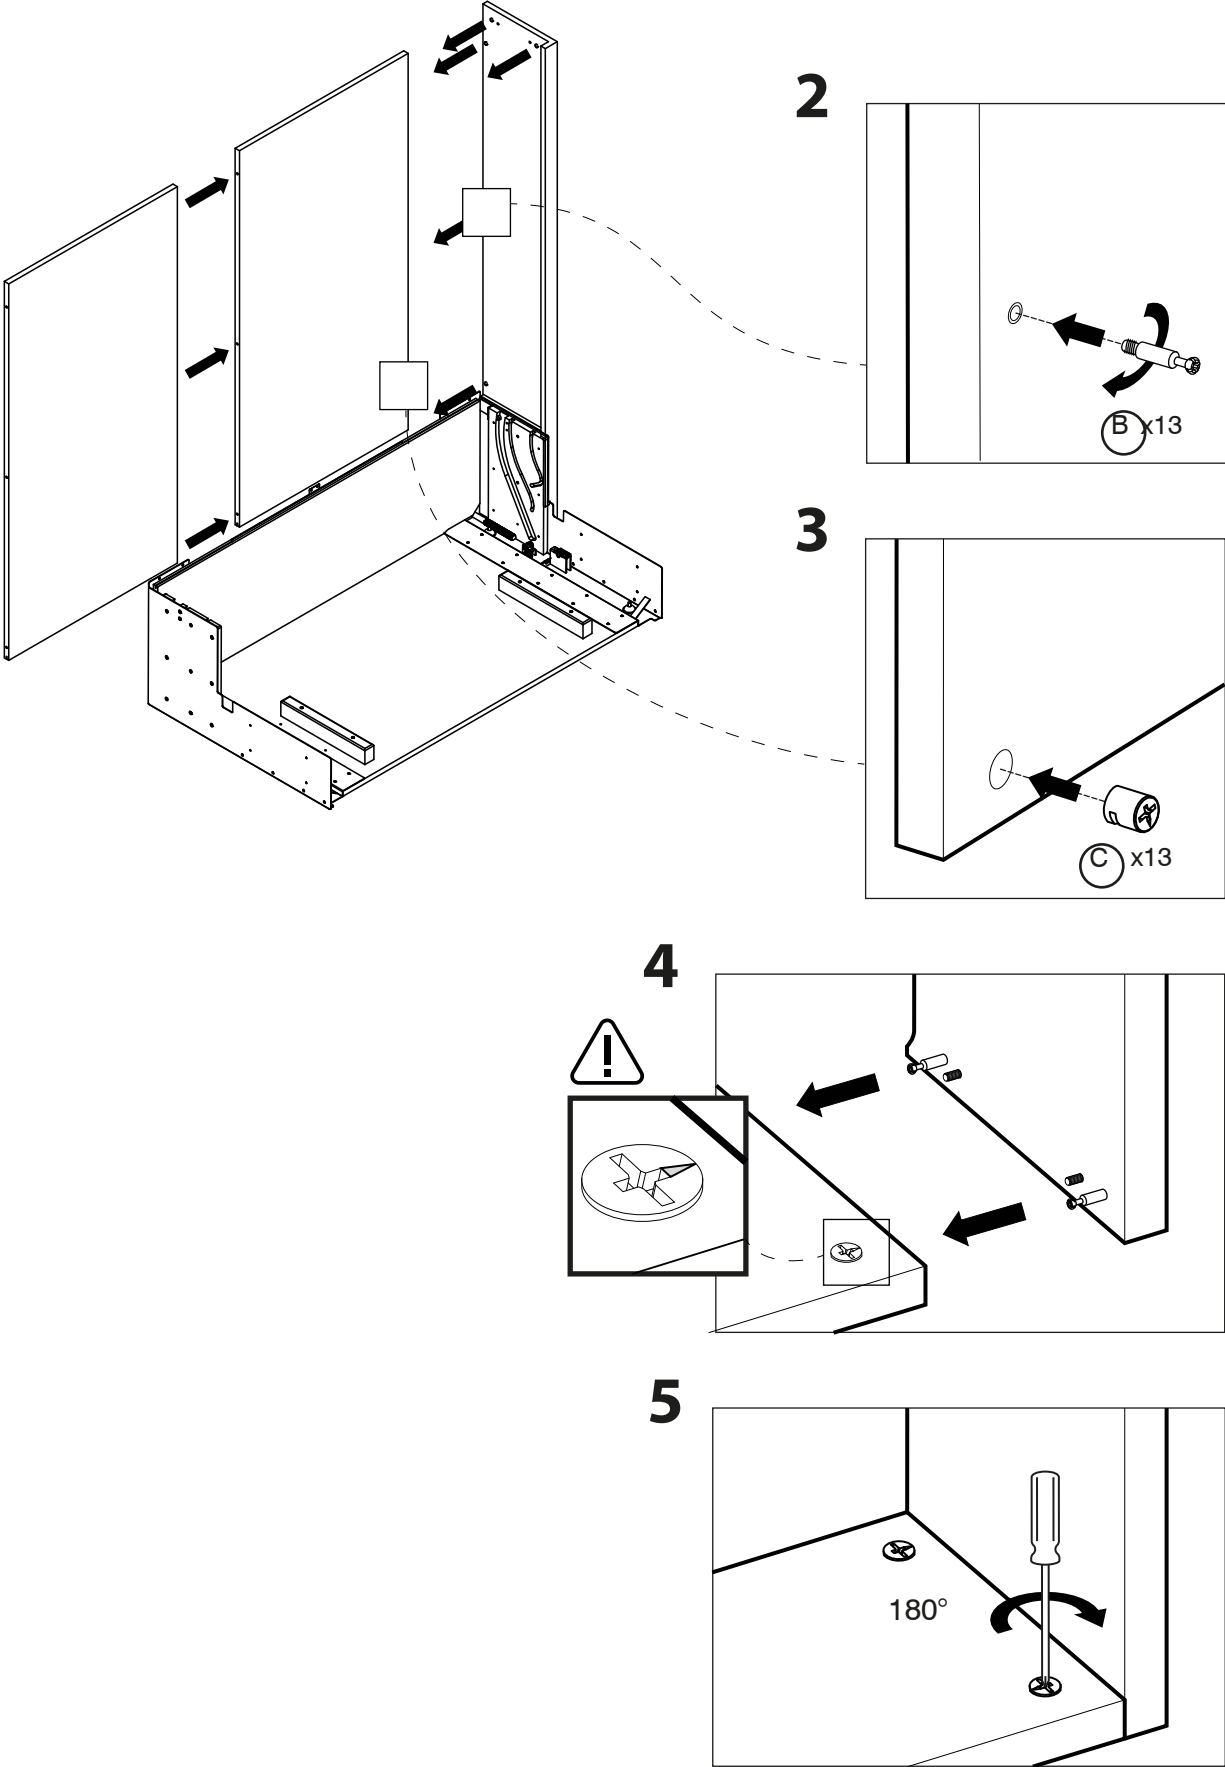


STRUCTURE ASSEMBLY


6

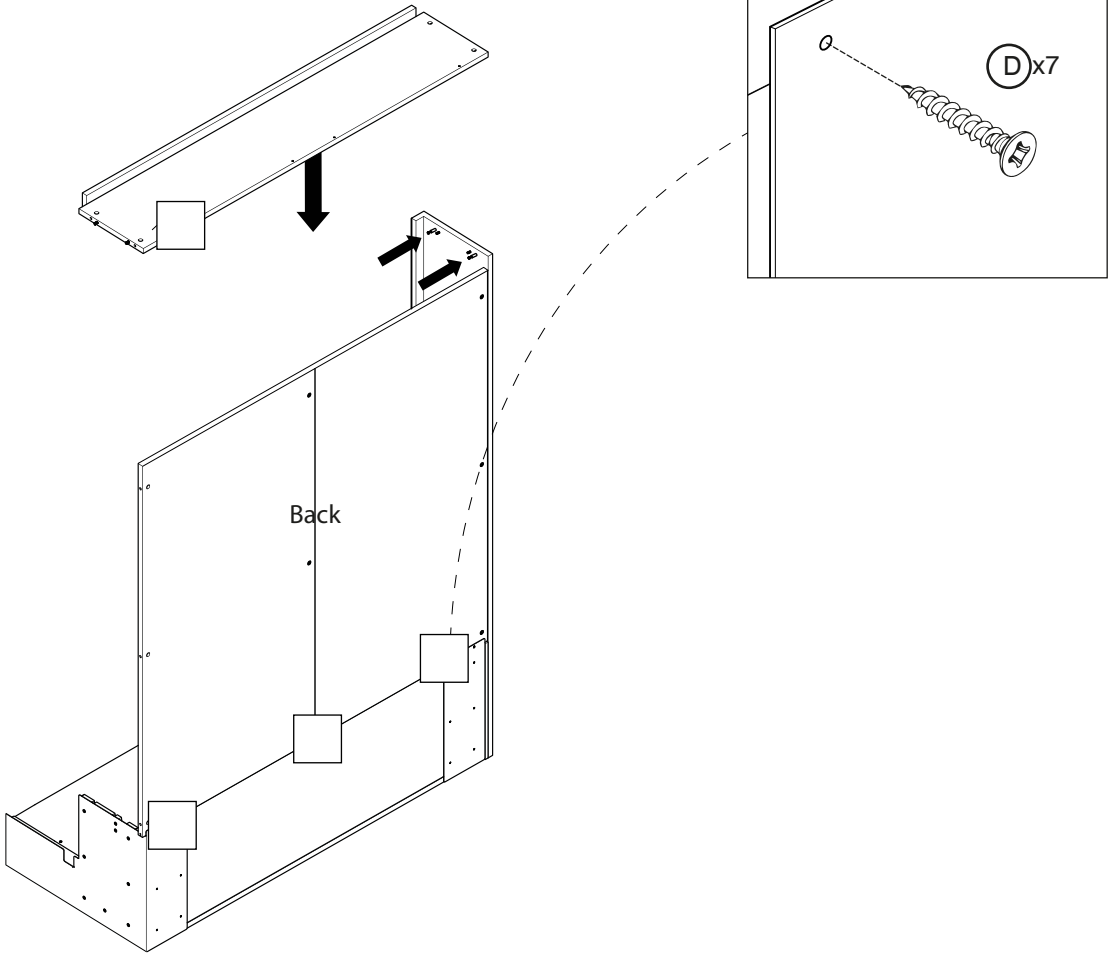


7

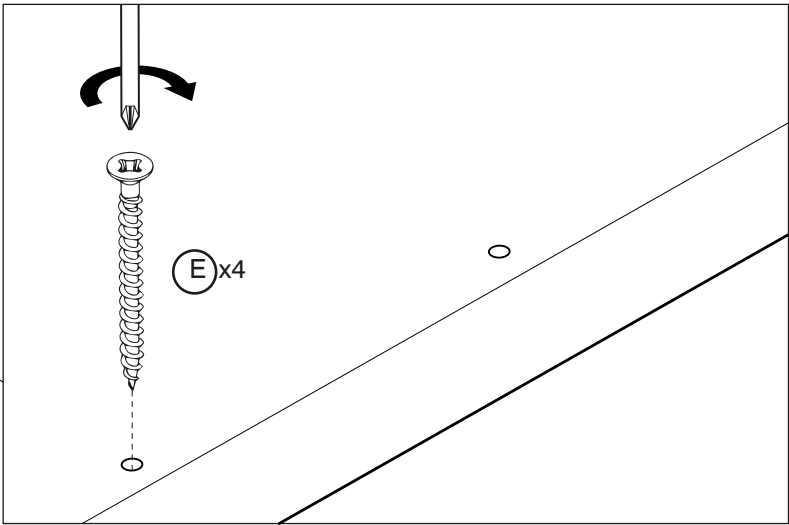

STRUCTURE ASSEMBLY

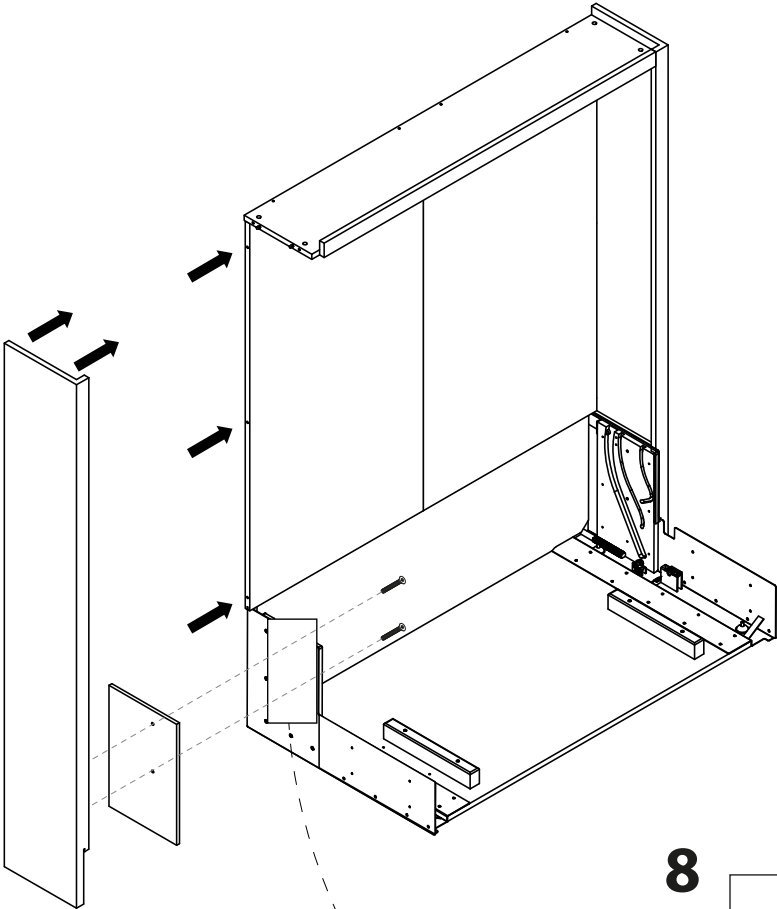


8

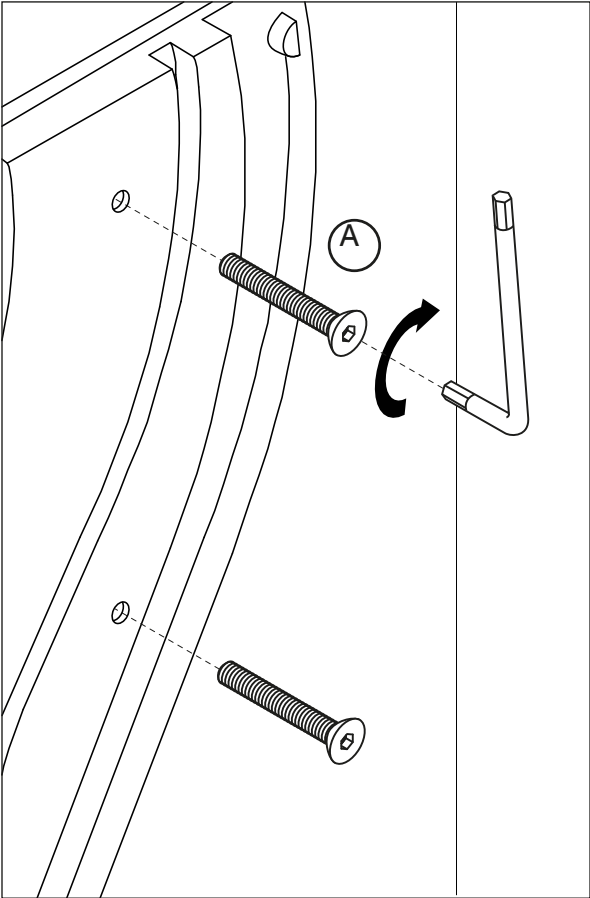


OPTIONAL WAND LIGHTING

- 9** Drill $\frac{1}{2}$ " hole at $21\frac{3}{8}$ " below upperbed structure panel (from inside) and $1\frac{1}{2}$ " in from the side. Install mounting plate with provided wood screws, aligning the $\frac{1}{2}$ " drill holes.

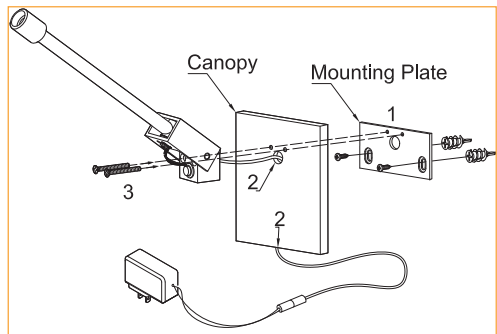


Wand Light Exploded Diagram

Cord Length = 118"

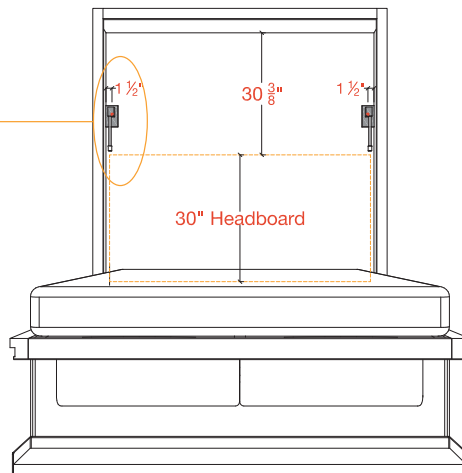


Front

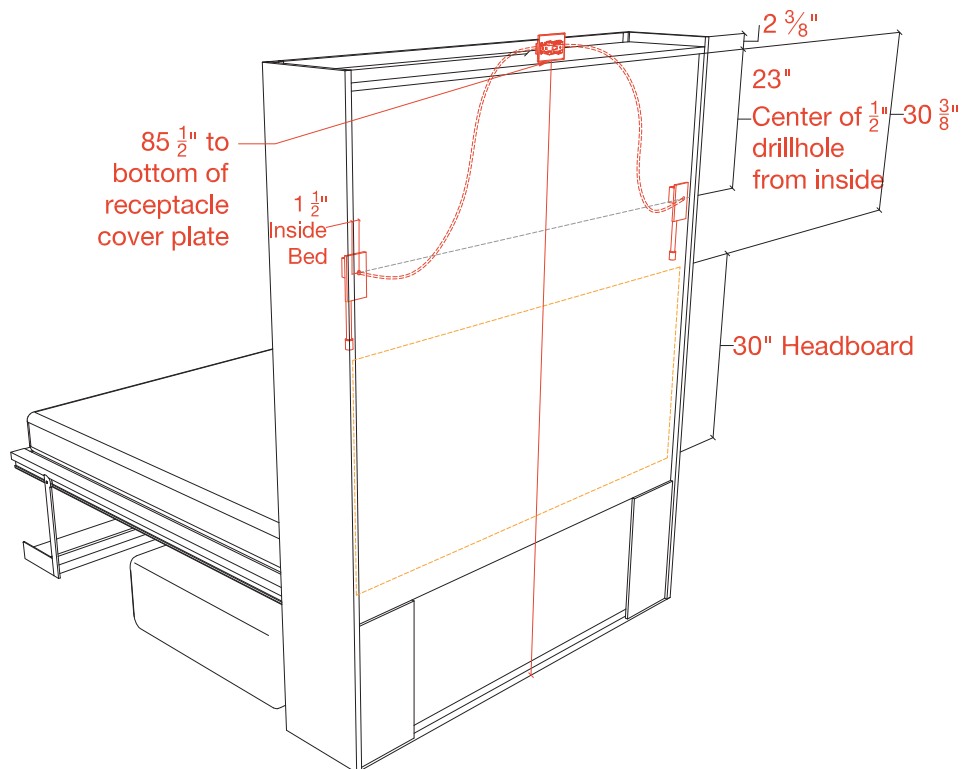


Back

LEVELING THE STRUCTURE


- 6 Ensure that the structure is level and plumb. To compensate for any floor unevenness, use the adjustable feet on the bottom panel (det. 1 4a) to level the structure.

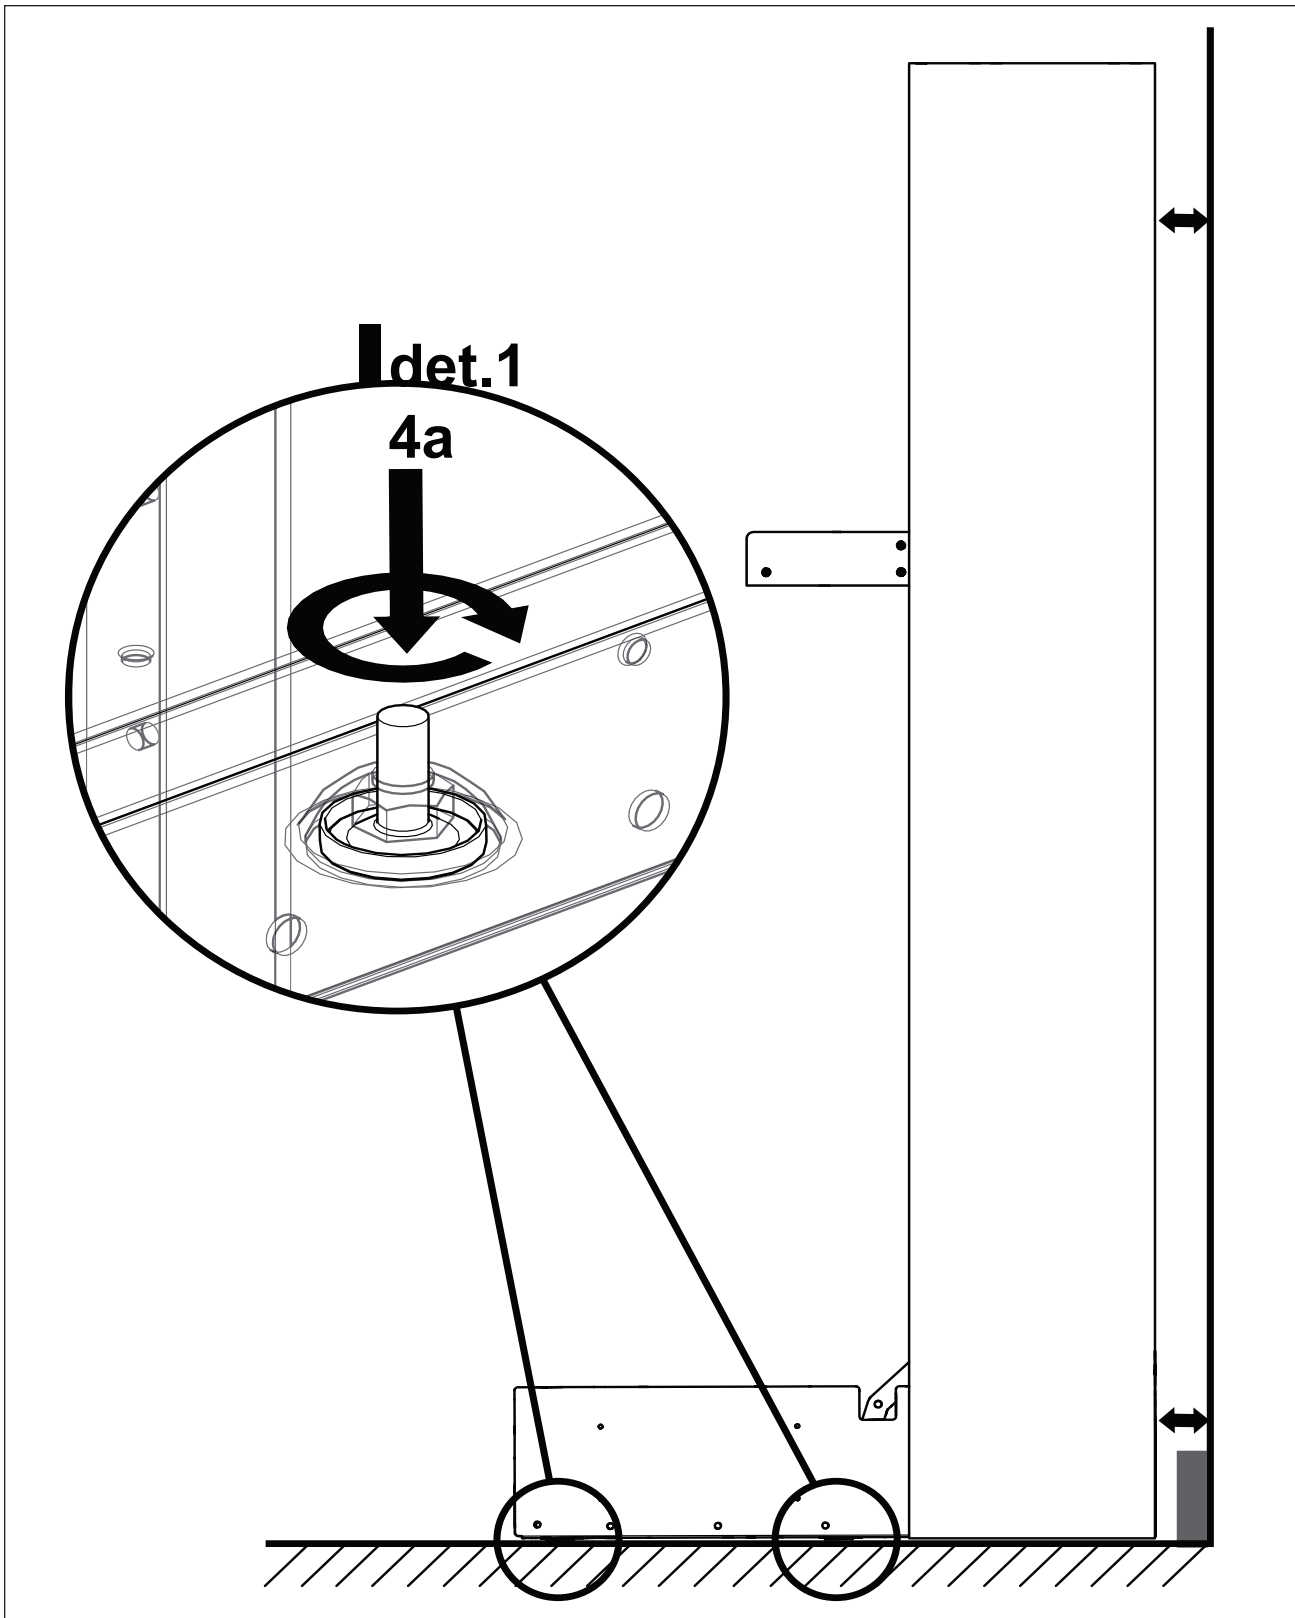


BED FRAME ASSEMBLY

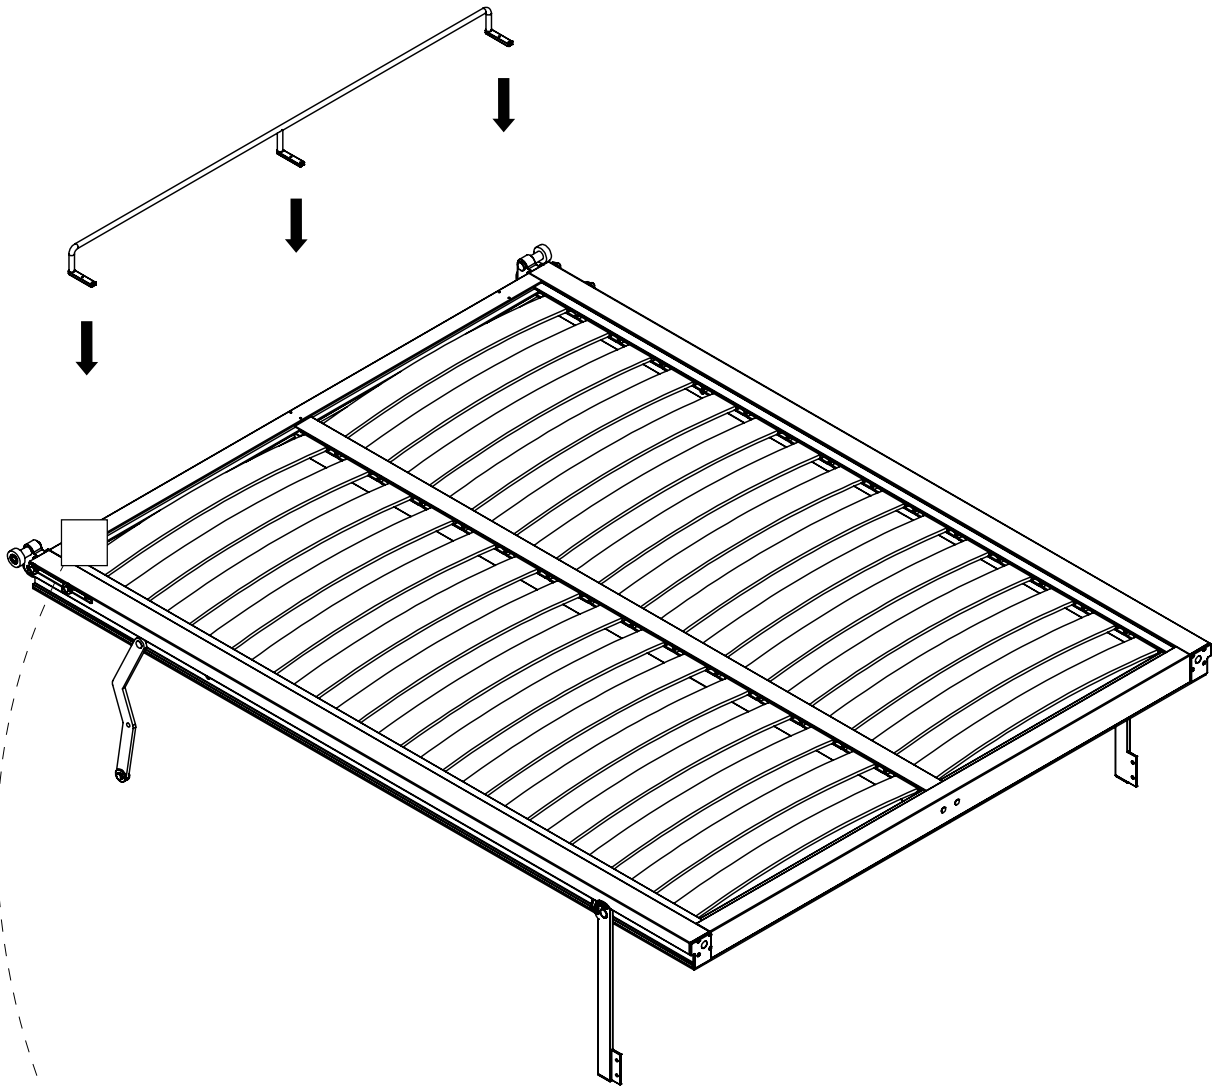


10

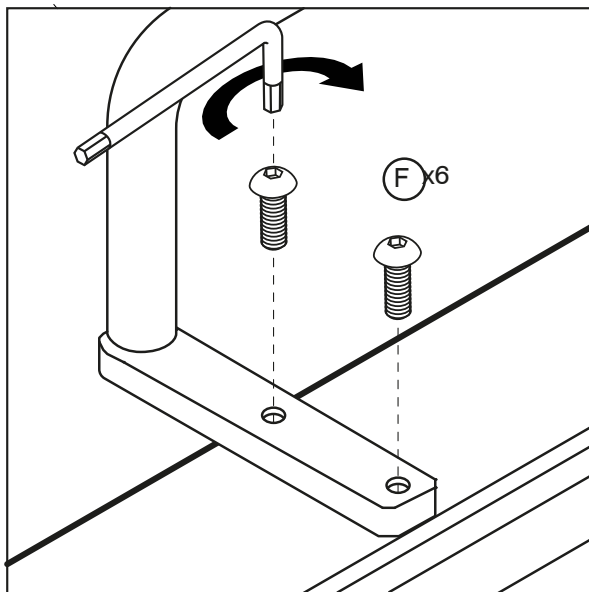


BED FRAME ASSEMBLY

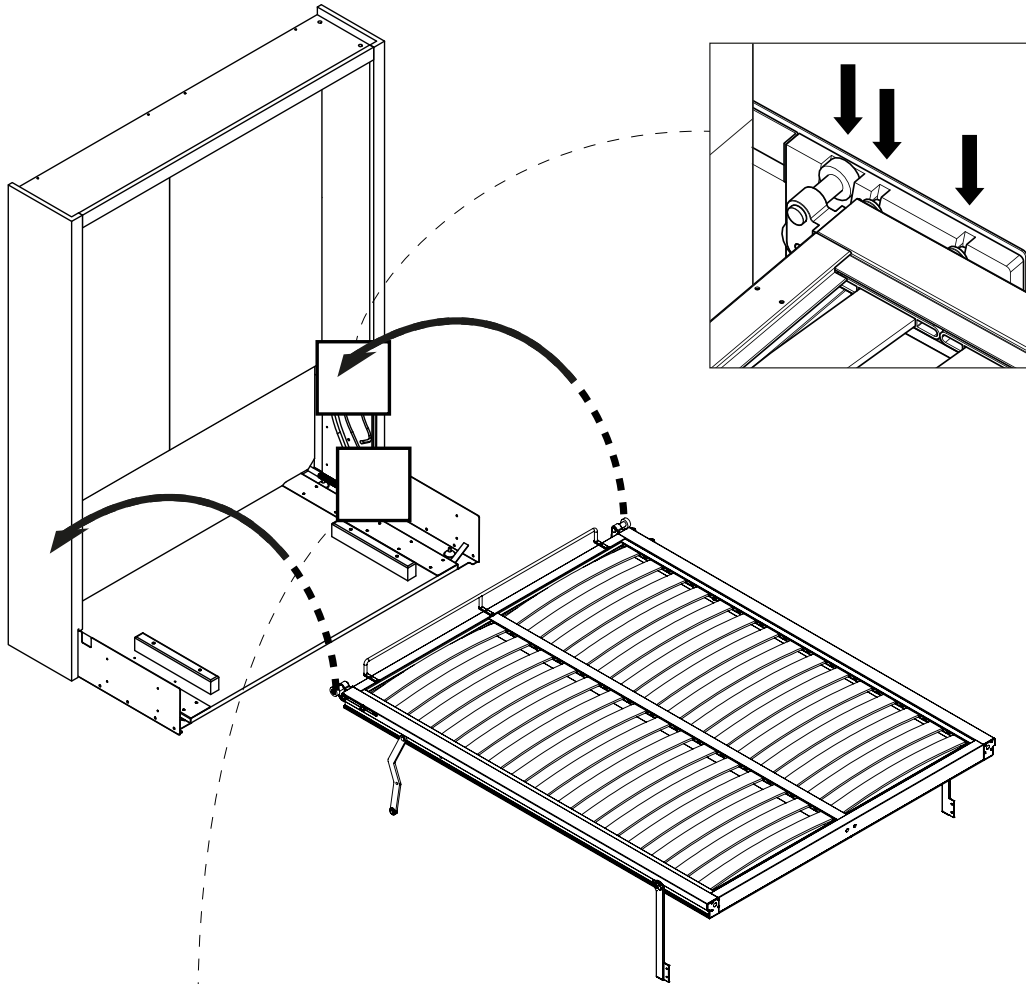


11

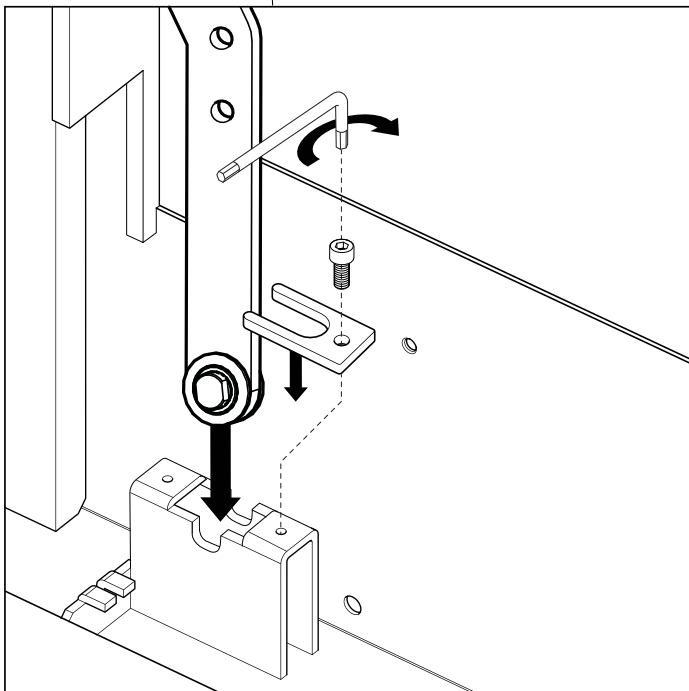


BED FRAME ASSEMBLY

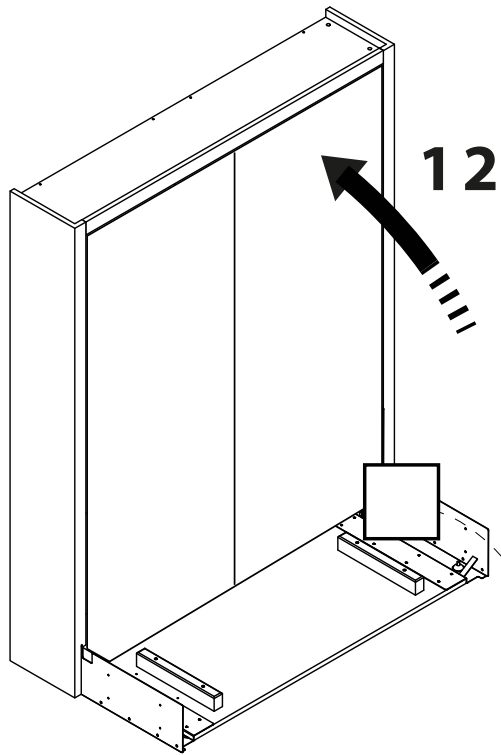


13

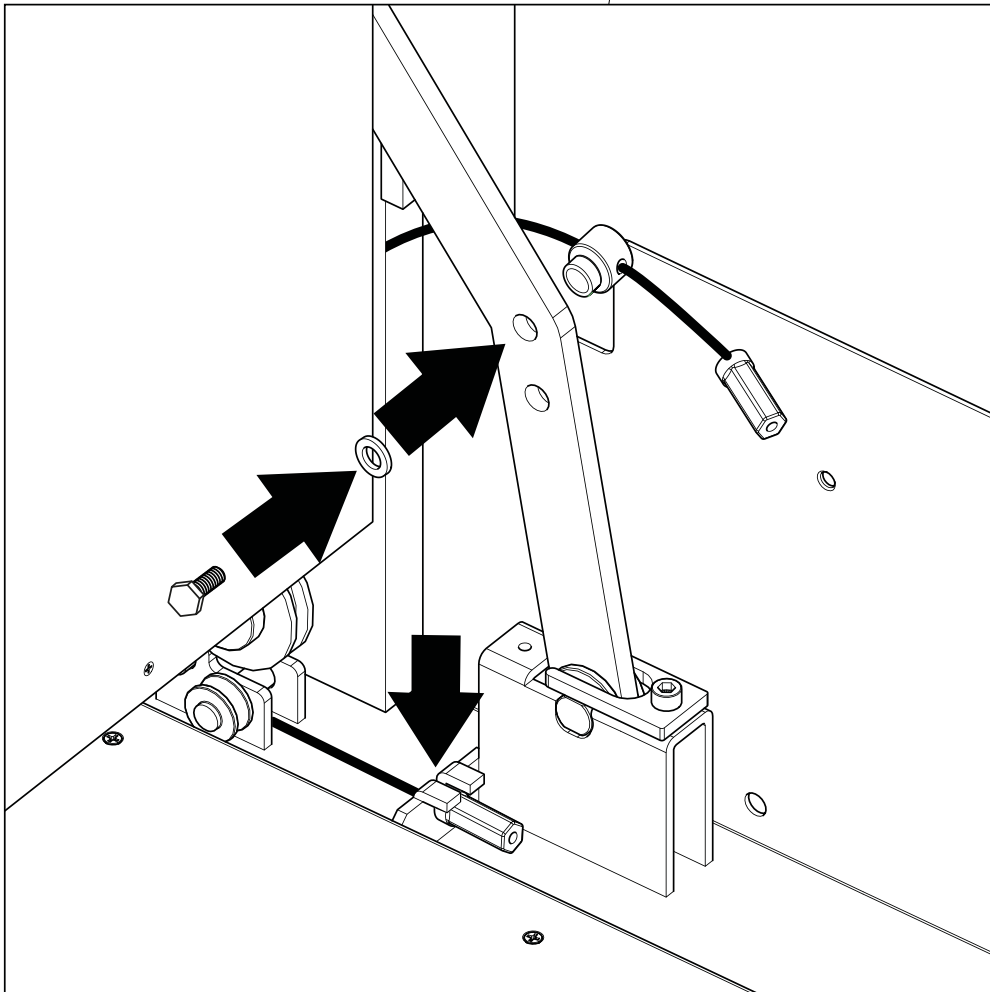





SHELF ASSEMBLY

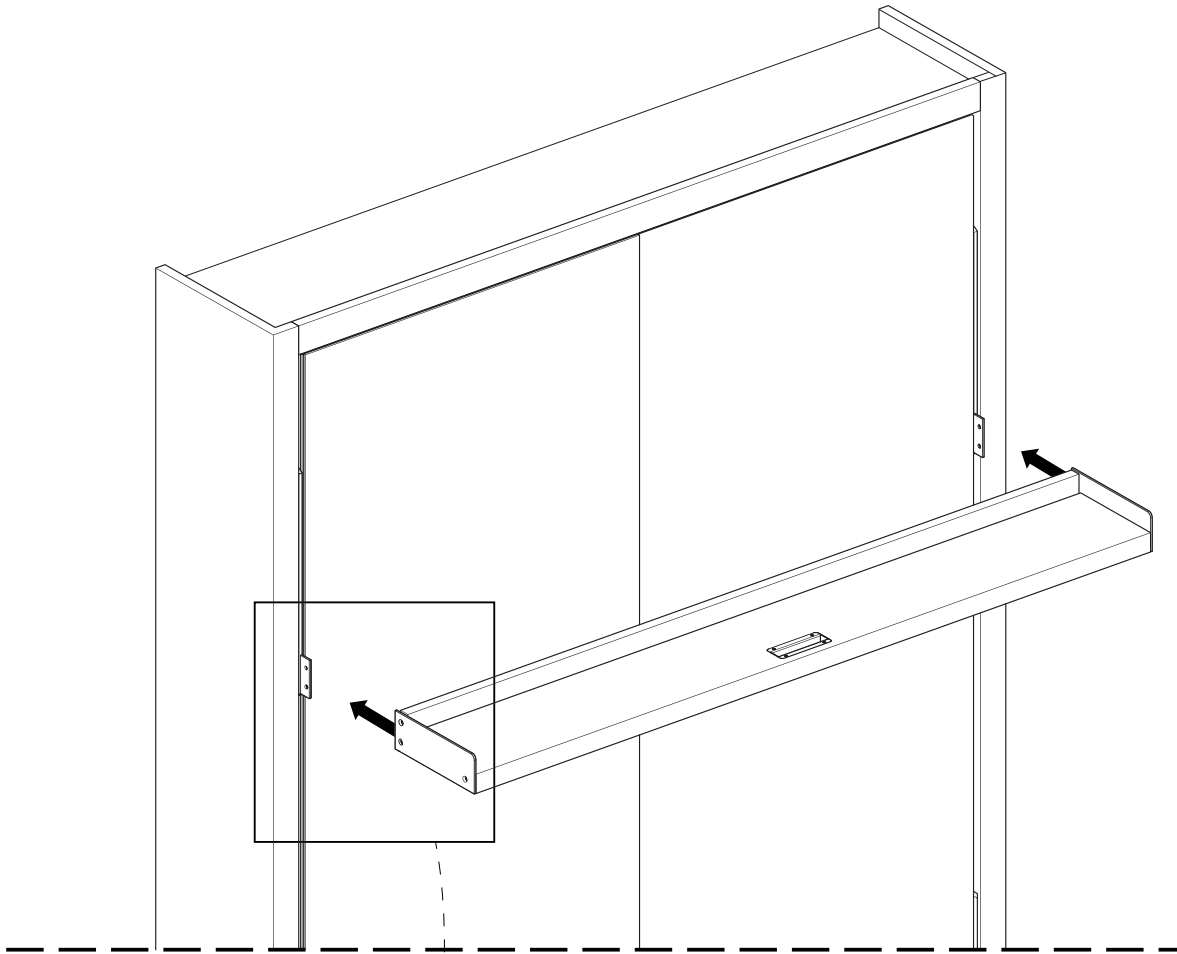

14

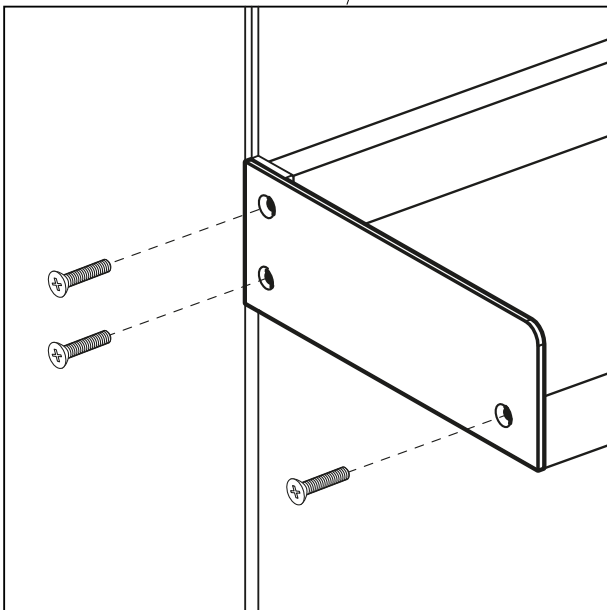


15

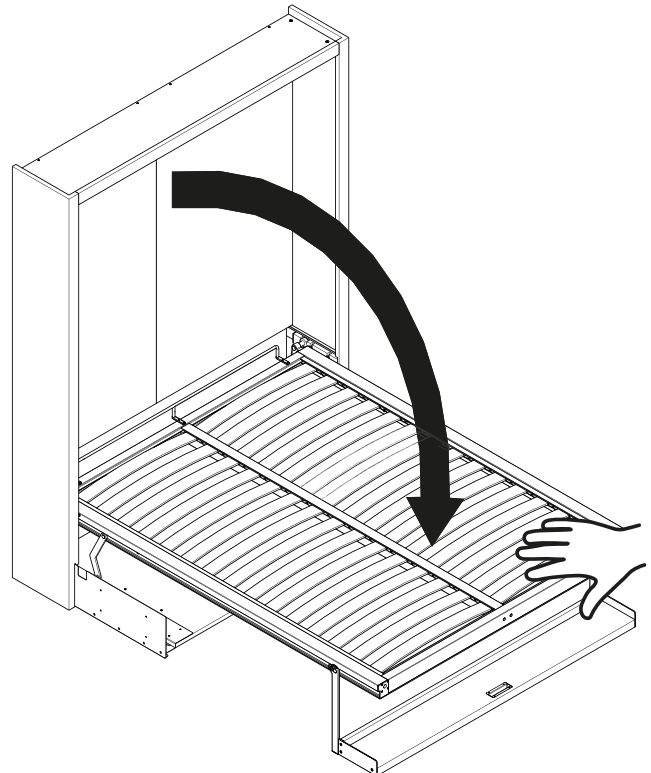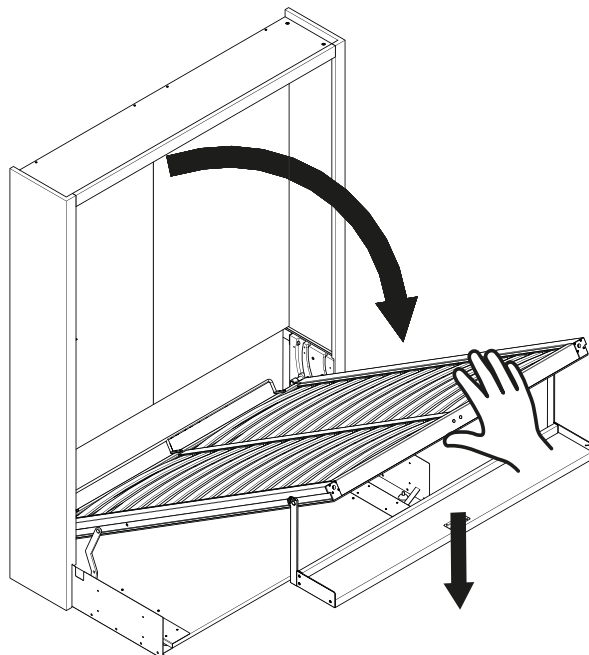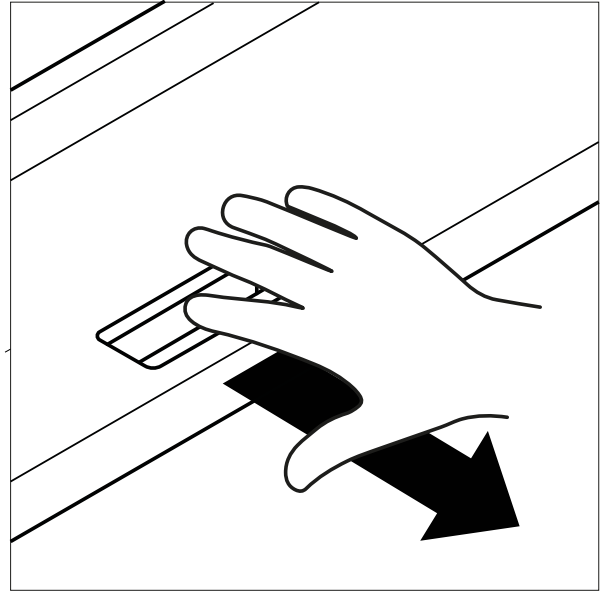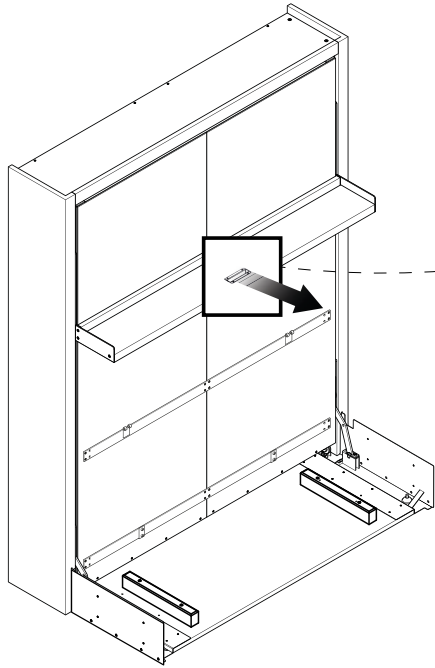

MATTRESS & HEADBOARD INSTALLATION


16

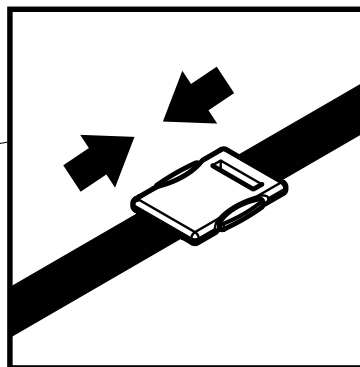


To balance the bedframe, adjust the spring tension controllers with the 8mm allen wrench provided. Turn clockwise to adjust the tension in order to close the bed with ease. Ensuring that each side of the bedframe is adjusted equally.

Note: An excessive number of turns may damage the cable.


17

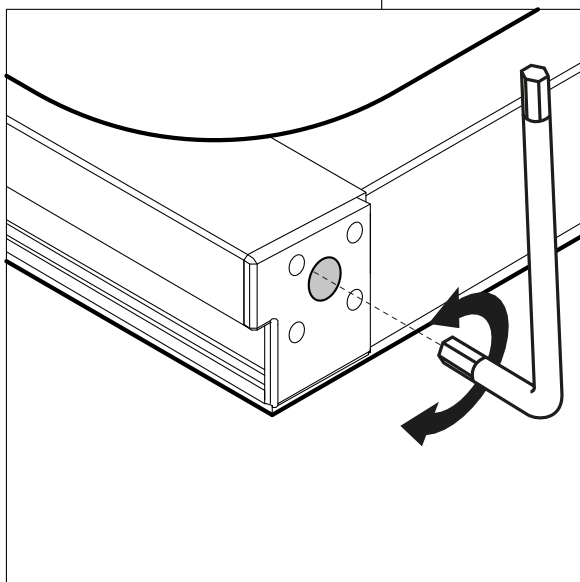


SOFA INSTALLATION

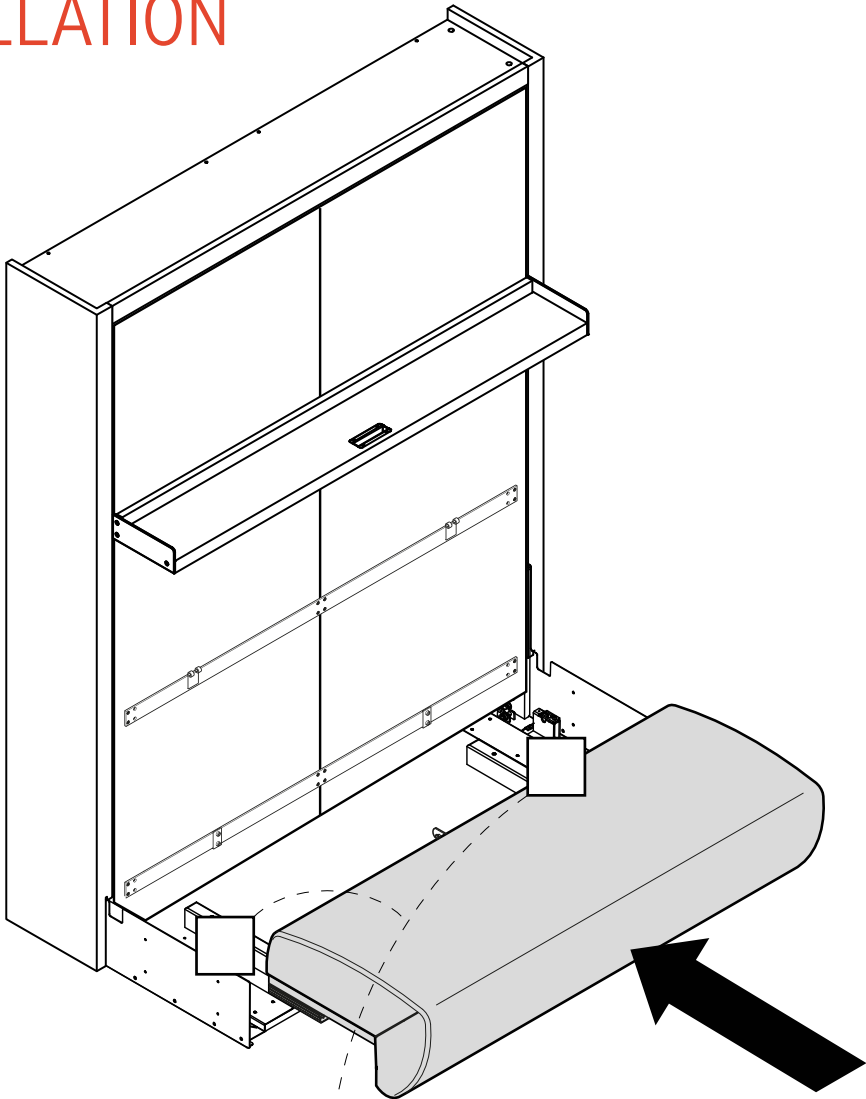

20


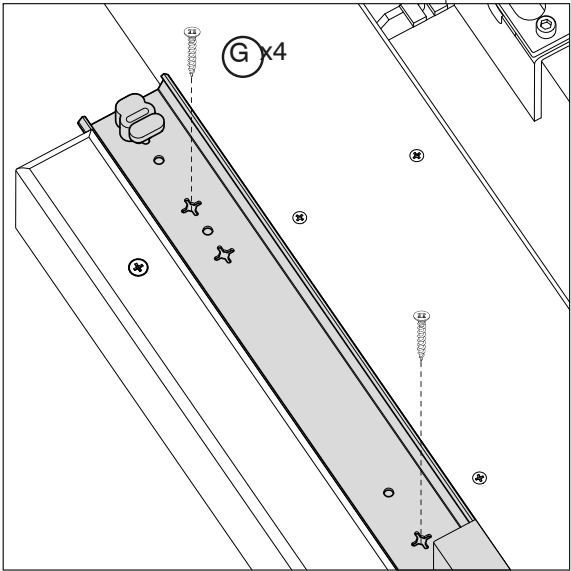


SOFA INSTALLATION

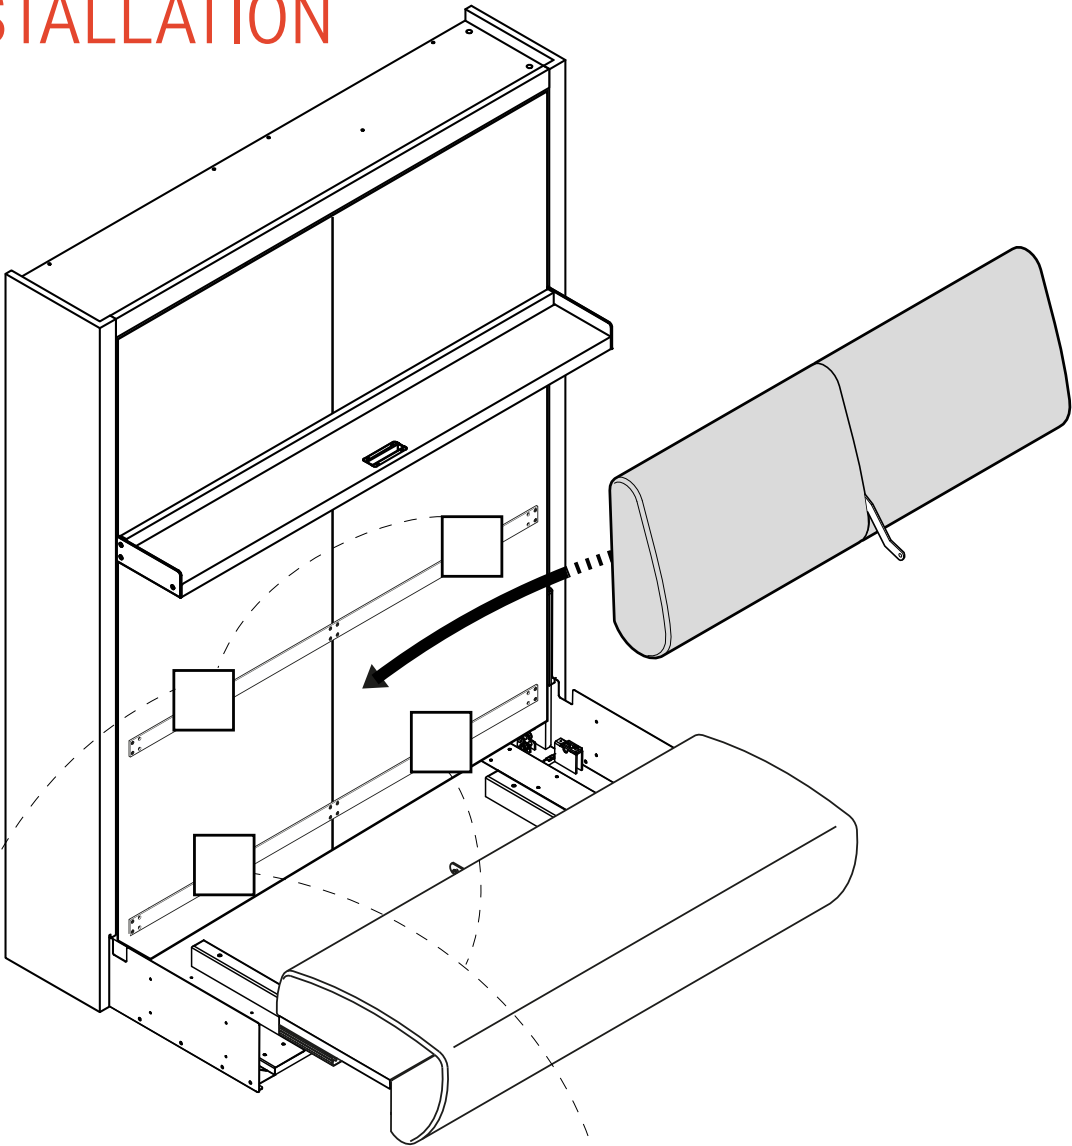


22



21

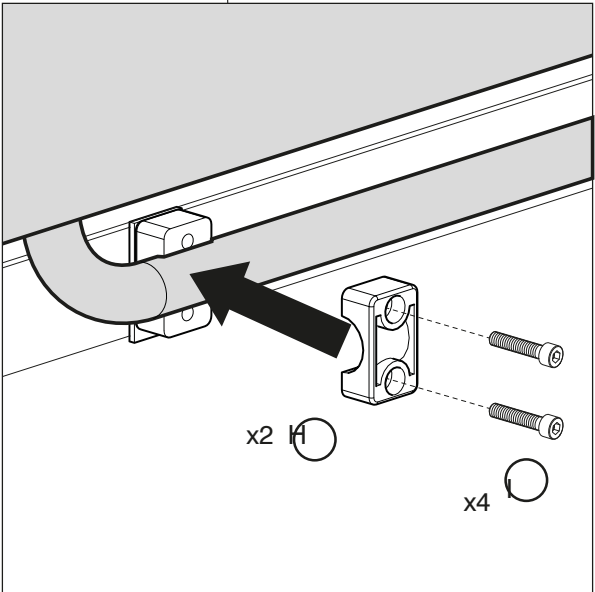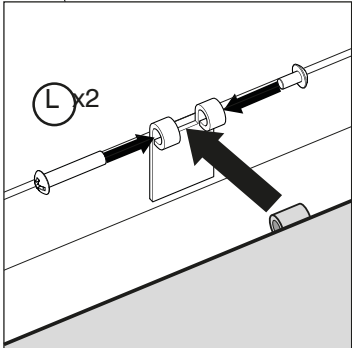


SOFA INSTALLATION

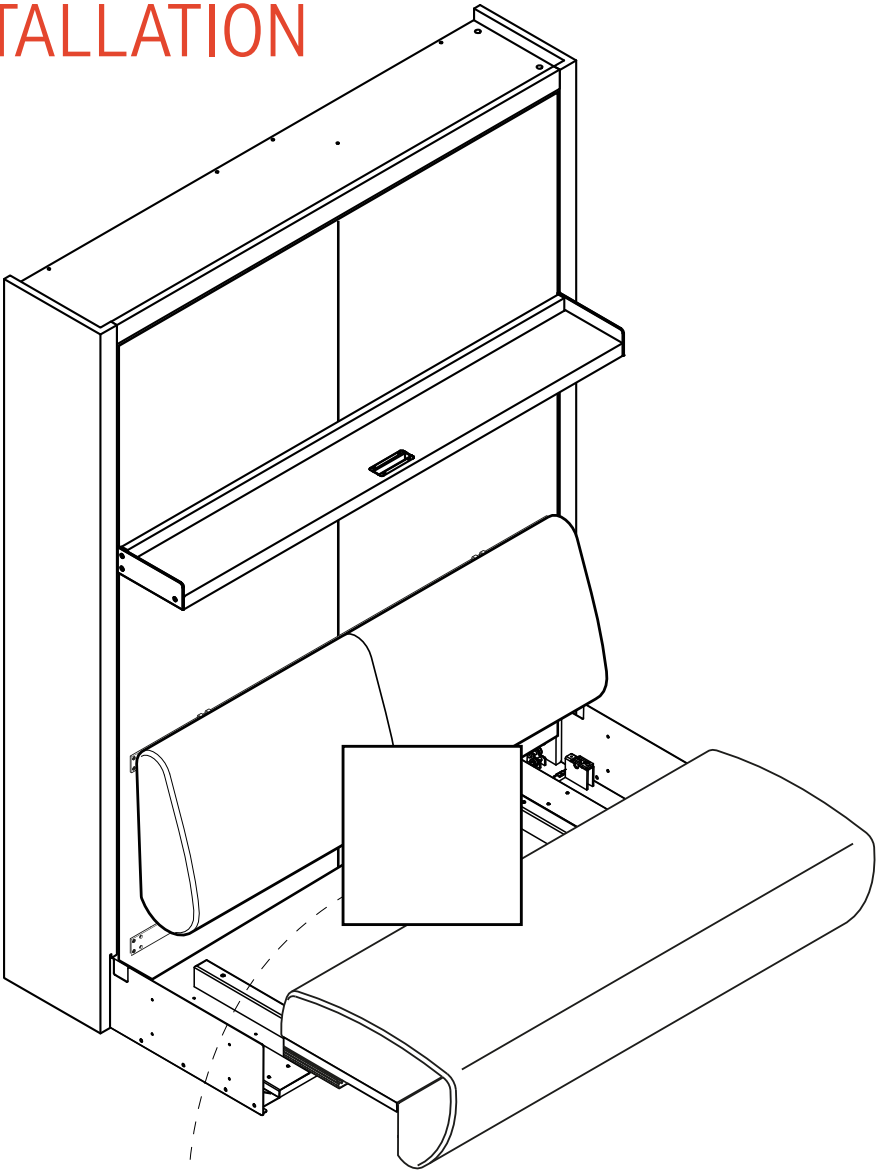


23

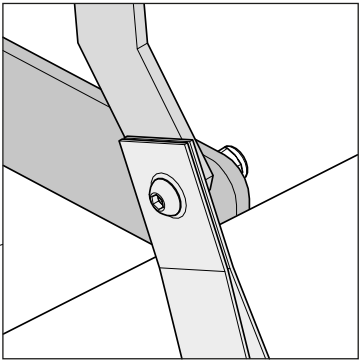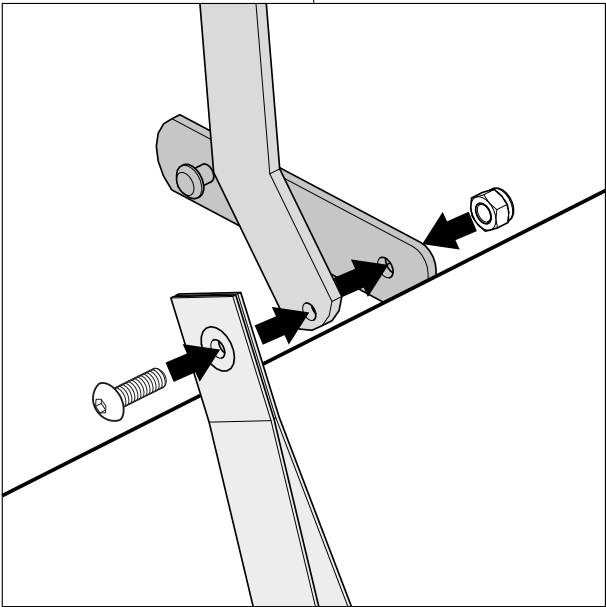


SOFA INSTALLATION

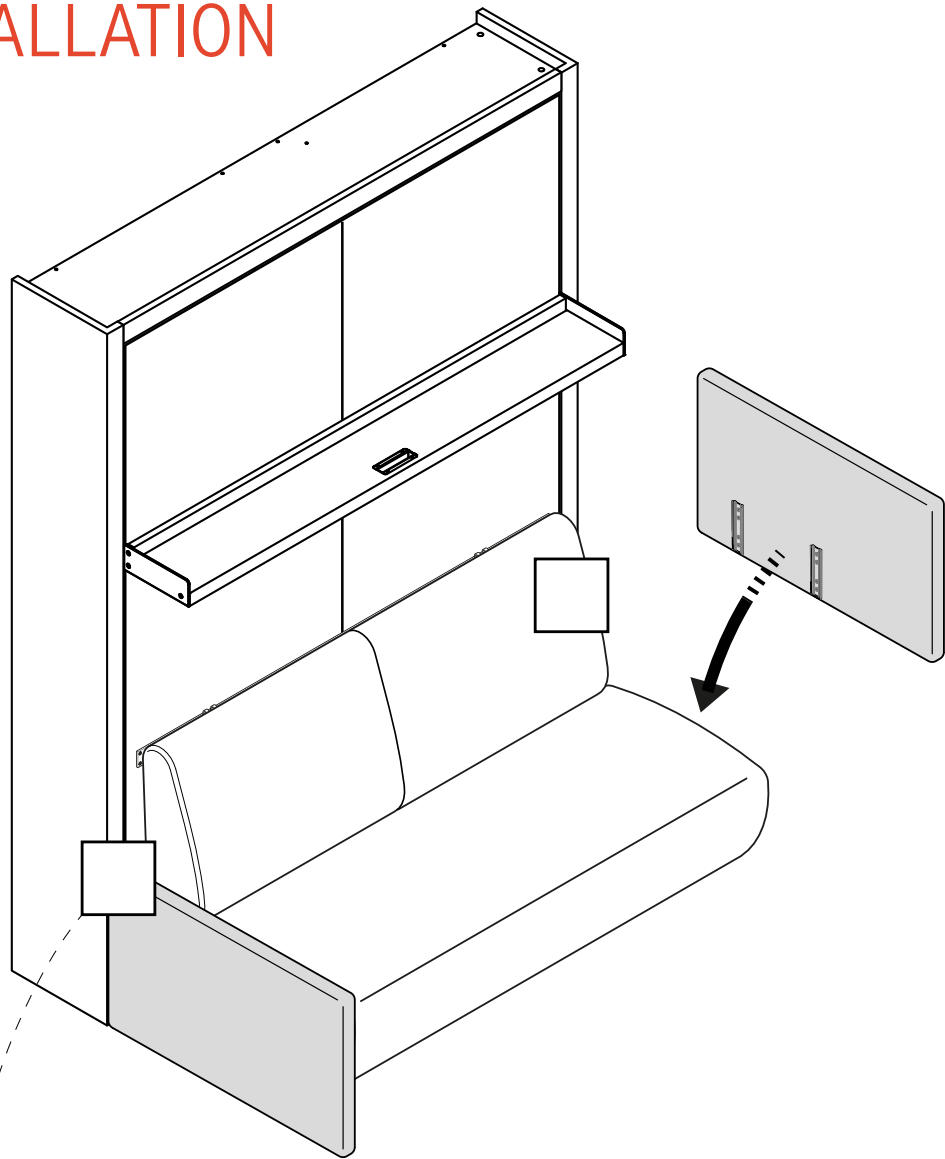


24

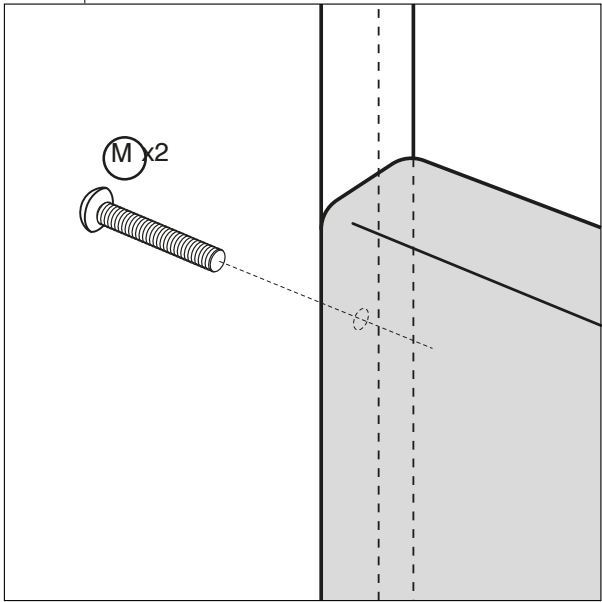


SOFA INSTALLATION

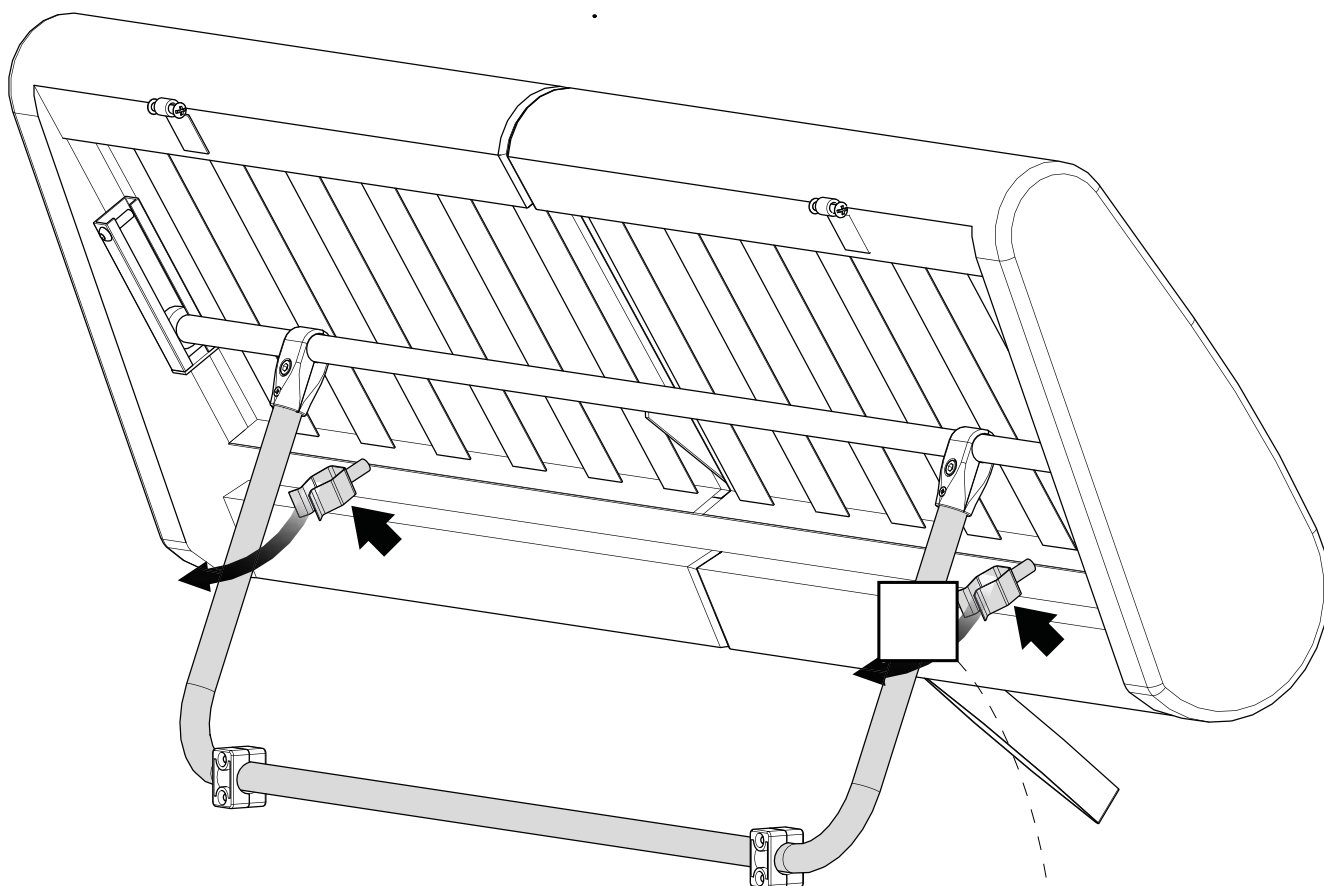

Before opening the bed be sure that the **clamps** are correctly **connected** to the tube.

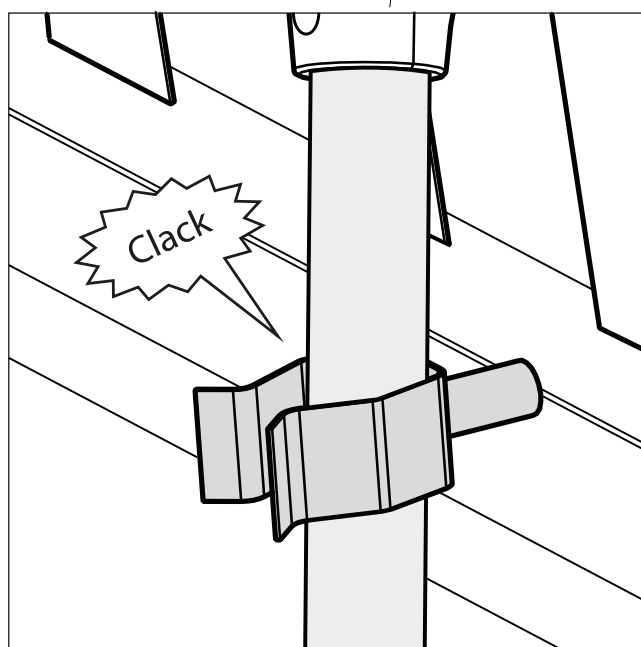

Tilting backrest and footrest

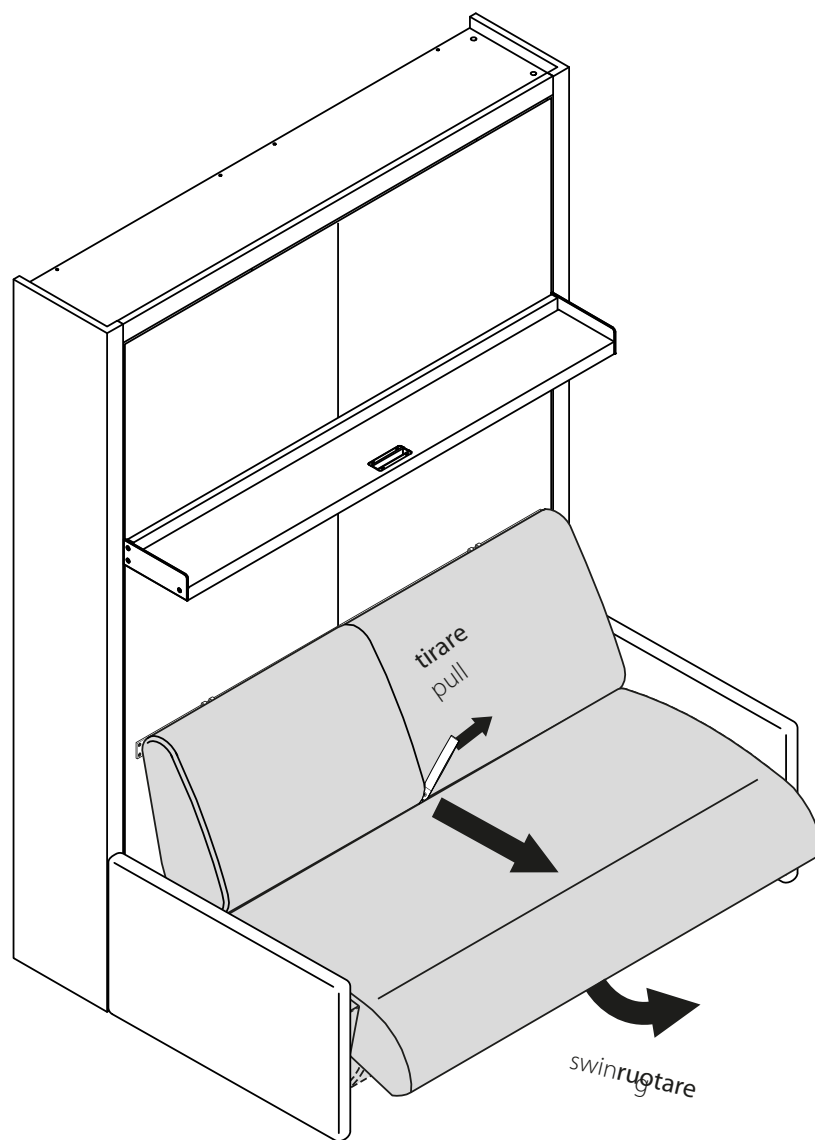

SAFELY OPERATING YOUR ITO BED

OPENING YOUR SWING BED

1

Make sure that any and all **items on shelf are stable and secure** at all times.

Prior to opening bed, **remove any items taller than approx. 12."**

Remove back cushions.

To store the cushions or bedding under seat, lift sofa seat from bottom front edge for **Swing**.

If you have a coffee table, **push table against sofa. DO NOT STAND ON TABLE!** If you cannot reach shelf, move table aside.



2

Grasp the handle located in the middle of the shelf and **pull** with one hand, while supporting the top of the bed frame with the other as you walk backwards, allowing the bed frame to **descend under control**.



3

Make sure to **support the bed** frame with both hands for the entire descent until the shelf is firmly resting on the floor.


It may be necessary to **gently push down** on the bed frame for the final few inches.



4

Release the two mattress **straps** by squeezing the center of the clasp.

Tuck the straps under the mattress.

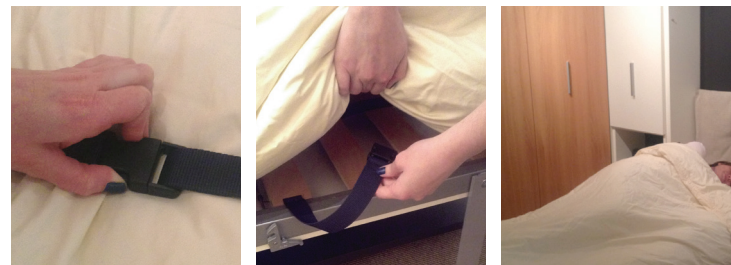

5

Sleep!

SAFELY OPERATING YOUR ITO BED

CLOSING YOUR SWING BED

- 1 Remove **pillows** and **tuck bedding in** on all sides around mattress.

Close both mattress **straps** around the bedding.



- 2 Stand in the middle of the bed, **grasp front edge** of bed frame and lift.

Continue to **lift bed frame** as you walk forward toward wall.

Push bed frame into structure until the bed frame is completely vertical.

Replace cushions.



ADDITIONAL INFORMATION FOR THE SWING MODEL WITH CHAISE

- 1 To **adjust the backrest** of the Swing chaise, **pull forward** on the upholstered shelf of the chaise until you hear a "click", then **adjust to the position** of your choice.

To return the support, pull forward until you hear the "click", then push back to horizontal position.



- 2 To **pull out or push in the chaise** on the Swing, **remove the back cushion** first. You can then easily extend or retract the chaise without friction.



NOTE: Your Swing is designed so that most bedding can remain on the bed when closed. If you experience difficulty closing the bed, your bedding might be too thick.

